




- Selectable chime tones (SH-532BQ only)
 - Three tone options: fading, single-tone, and dual-tone
 - Any combination of tones may be selected
 - SH-512BQ supports a single-tone only
- Low-profile, flush-mount design
- Durable white plastic housing
- Compatible with standard single-gang back boxes
- 4⁵/₈"x2¹⁵/₁₆"x1⁹/₁₆" (117x75x39mm)

Parts List

1x Chime	2x Screws
2x Plastic wall anchors	1x Manual
2x Screw covers	

Overview

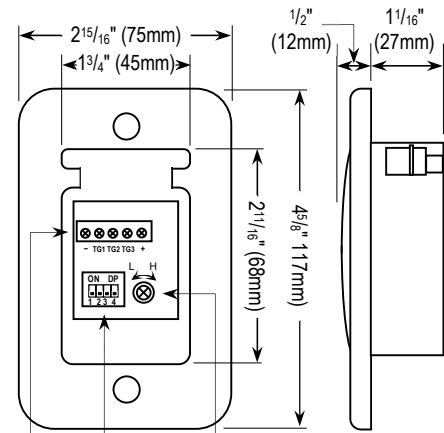

Terminal Block DIP Switches Volume Potentiometer
(SH-532BQ) (SH-532BQ)


Specifications

Model	SH-512BQ	SH-532BQ
Type	Single-tone	Multi-tone
Operating voltage	10~30 VDC	12~24 VDC
Current draw	10mA@12VDC	200mA@12VDC (max volume)
Chime volume	105dB	80~88 dB
Dimensions	4 ⁵ / ₈ "x2 ¹⁵ / ₁₆ "x1 ⁹ / ₁₆ " (117x75x39 mm)	

Installation for SH-532BQ

1. Run the respective wires to a back box and connect the wiring as in Fig. 1 – Wiring Diagram.
2. A single trigger may be connected to one or more of the three trigger inputs, depending on the type of tone desired. If connected to multiple inputs, two of the respective tones will sound in the following order: input 1 – fading tone, input 3 – dual tone, input 2 – single tone
3. Alternatively, multiple triggers can be connected, each to a single trigger input with a distinct tone depending on which trigger input it is connected to.

Fig. 1 – Wiring Diagram

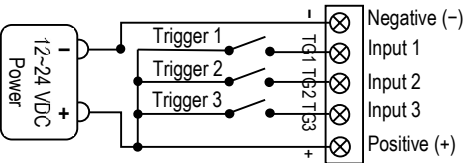


Installation for SH-532BQ (Continued)

- 4. Set the DIP switches to choose the tone settings (See Fig. 2 and 3).
- 5. Adjust the volume using the potentiometer on the back of the chime.
- 6. Using the included screws, install in the back box, taking care not to crimp the wires.

Fig. 2 – DIP Switch Settings

SW	SW POS	SW 1 ON	SW 1 OFF
2 (Input 3)	ON	Continuous	--
	OFF	Sounds 3x	Sounds 1x
3 (Input 2)	ON	Continuous	--
	OFF	Sounds 3x	Sounds 1x
4 (Input 1)	ON	Continuous	--
	OFF	Sounds 3x	Sounds 1x

Fig. 3 – DIP Switch Example, Input 3



Installation for SH-512BQ

- 1. Connect the positive of the power supply to the positive of the single-tone chime.
- 2. Connect the negative of the power supply to the negative of the single-tone chime.
- 3. Using the included screws, install in the back box, taking care not to crimp the wires.

IMPORTANT: Users and installers of this product are responsible for ensuring that the installation and configuration of this product complies with all national, state, and local laws and codes. SECO-LARM will not be held responsible for the use of this product in violation of any current laws or codes.

California Proposition 65 Warning: These products may contain chemicals which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

WARRANTY: This SECO-LARM product is warranted against defects in material and workmanship while used in normal service for one (1) year from the date of sale to the original customer. SECO-LARM's obligation is limited to the repair or replacement of any defective part if the unit is returned, transportation prepaid, to SECO-LARM. This Warranty is void if damage is caused by or attributed to acts of God, physical or electrical misuse or abuse, neglect, repair or alteration, improper or abnormal usage, or faulty installation, or if for any other reason SECO-LARM determines that such equipment is not operating properly as a result of causes other than defects in material and workmanship. The sole obligation of SECO-LARM and the purchaser's exclusive remedy, shall be limited to the replacement or repair only, at SECO-LARM's option. In no event shall SECO-LARM be liable for any special, collateral, incidental, or consequential personal or property damage of any kind to the purchaser or anyone else.

NOTICE: The SECO-LARM policy is one of continual development and improvement. For that reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is also not responsible for misprints. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. Copyright © 2026 SECO-LARM U.S.A., Inc. All rights reserved.

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606
Phone: (949) 261-2999 | (800) 662-0800

Website: www.seco-larm.com
Email: sales@seco-larm.com



MI_SH-5x2BQ_260330.docx