

## Miniature Surface-Mount Contacts

Please visit the SECO-LARM website [www.seco-larm.com](http://www.seco-larm.com) for complete installation instructions.

Please read the manual carefully before beginning installation.

### SM-204Q/W

1" (25mm) Gap, Closed Loop, Center Leads, White

### SM-204Q/BR

1" (25mm) Gap, Closed Loop, Center Leads, Brown

### Features:

- Miniature "flange-type" surface-mount magnetic contacts perfect for sliding doors and windows where space is limited
- Screw or adhesive mount
- Mounting flange breaks off for extra miniature size
- Weatherproof high-impact ABS plastic case
- Contact reed switch is SPST, deactivated rhodium on gold underplating for a longer expected life
- For closed loop circuits
- 1" (25mm) Gap
- 15" (38cm) Wire leads extend from center of switch
- Double-sided tape included
- Lifetime limited warranty




SM-204Q/BR shown



### Specifications:

Model number		SM-204Q/W	SM-204Q/BR
Loop type		Closed loop	
Electrical configuration		N.O. (SPST)	
Operation gap		1" (25mm)	
Connectors		15" (38cm) Leads from center	
Color		White	Brown
Material	Case	High-impact ABS plastic	
	Contacts	Deactivated rhodium on gold underplating	
Contact rating		1.0A@10VDC (max.)	
		10W (max.)	
Operating temperature		-15°~160° F (-25°~70° C)	
Switch cycles		50 Million (0.1mA@5VDC)	
Dimensions (without tabs)	Switch	1 <sup>3</sup> / <sub>8</sub> "x3 <sup>3</sup> / <sub>8</sub> "x1 <sup>1</sup> / <sub>4</sub> " (35x10x6 mm)	
	Magnet	1 <sup>3</sup> / <sub>8</sub> "x3 <sup>3</sup> / <sub>8</sub> "x1 <sup>1</sup> / <sub>4</sub> " (35x10x6 mm)	
Magnet type		Alnico 5	

### Dimensions:

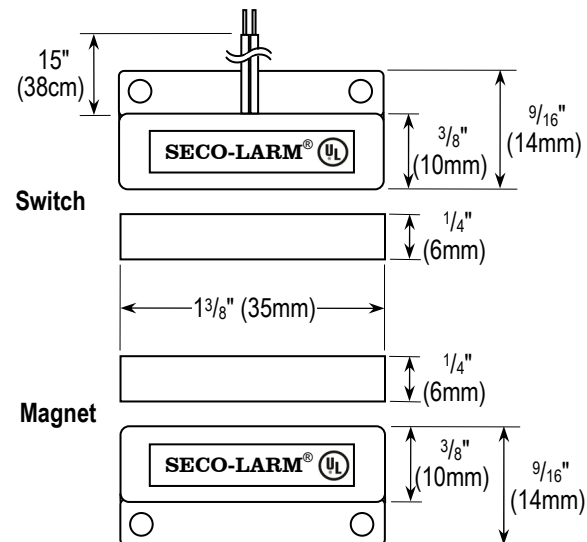

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)



Copyright © 2019 SECO-LARM U.S.A., Inc. All rights reserved.  
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.  
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

Order Part#: 763-204%

PI\_SM-204Q\_190621\_ML.docx

## Miniatura de Montaje Superficial Contactos Magnéticos


Por favor visite el sitio web de SECO-LARM [www.seco-larm.com](http://www.seco-larm.com) para obtener instrucciones de instalación completas.  
Por favor lea el manual antes de usar el equipo.

**SM-204Q/W** 1" (25mm) Brecha, Lazo Cerrado, Cables del Centro, Blanco

**SM-204Q/BR** 1" (25mm) Brecha, Lazo Cerrado, Cables del Centro, Café

### Características:

- Contactos magnéticos de "montaje en superficie" en miniatura, perfectos para puertas corredizas y ventanas donde el espacio es limitado
- Montaje de tornillo o adhesivo (cinta adhesiva incluida)
- La brida de montaje se rompe para obtener un tamaño extra en miniatura
- Caja de plástico ABS resistente a la intemperie de alto impacto
- El interruptor de lengüeta de contacto es SPST, rodio desactivado en la capa inferior de oro para una vida útil más larga
- Brecha de 1" (25 mm)
- Los cables de 15" (38 cm) se extienden desde el centro del interruptor
- Para circuitos cerrados
- Tornillos de montaje incluido
- Garantía limitada de por vida

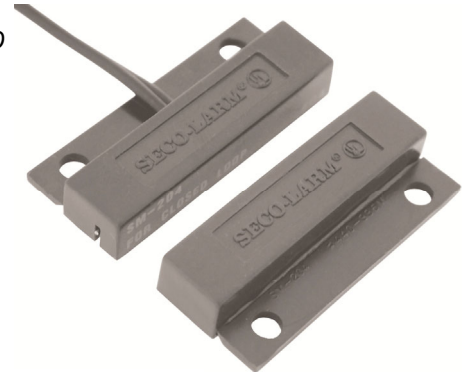

SM-204Q/BR mostrado



Contactos Chapados en Oro

Imán Alnico 5


15" Cables del Centro

Brecha de 1"

### Especificaciones:

Model	SM-204Q/W	SM-204Q/BR
Tipo de circuito	Lazo Cerrado	
Configuración eléctrica	N.A. (SPST)	
Brecha de Operación	1" (25mm)	
Conectores	15" (38cm) cables desde el centro	
Color	Blanco	Café
Material	Caja	Plástico ABS de Alto Impacto
	Contactos	Rodio desactivado en chapado de oro
Puntuación de contactos	1.0A@10V C.C. (max.)	
	10W (max.)	
Temperatura	-15°~160° F (-25°~70° C)	
Ciclos de conmutación	50 Milliones (0.1mA@5V C.C)	
Dimensiones (sin solapas)	Interruptor	1 3/8" x 3/8" x 1/4" (35x10x6 mm)
	Imán	1 3/8" x 3/8" x 1/4" (35x10x6 mm)
Tipo de imán	Alnico 5	

### Dimensiones:

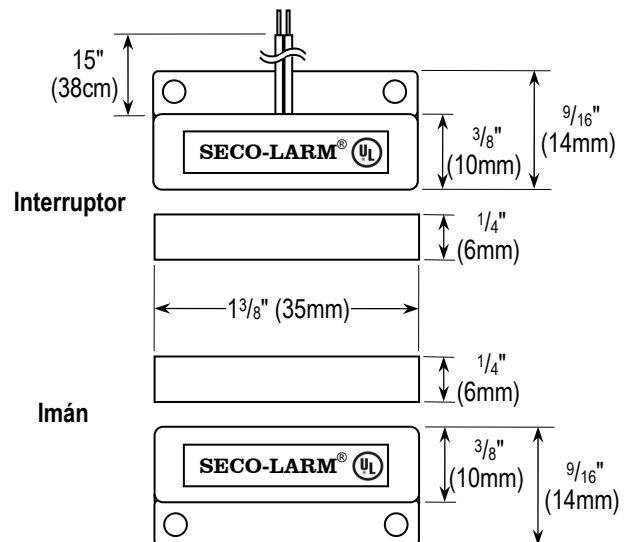

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)



Copyright © 2019 SECO-LARM U.S.A., Inc. Todos los derechos reservados. Todas las marcas comerciales son propiedad de SECO-LARM U.S.A., Inc. o sus respectivos propietarios. La póliza de SECO-LARM es de desarrollo y mejora continua. Por esa razón, SECO-LARM se reserva el derecho de cambiar las especificaciones y los precios sin previo aviso. SECO-LARM tampoco es responsable de errores de impresión.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

Order Part#: 763-204%

PI\_SM-204Q\_190621\_ML.docx