

Bluetooth® Access Controller




PR-B1124-PQ Proximity Card Reader

Streamlined, fully app-based setup using integrated Bluetooth® wireless technology. No codes to remember, intuitive app design for easy, visual programming. Provides convenience and security to the user and administrator. All data is secured on the device without the risks inherent with an internet connection.

Features:

- **No Codes to Remember** – Intuitive, visual app-based programming and management, 1,000 users, device options, etc.
- **More Than Access** – Can control doors, gates, lighting, machinery, etc.
- **No Internet Exposure** – All data secured locally on device
- **Multiple User Types** – Permanent, scheduled, temporary, # of times
- **Output Modes** – Timed relock, continually unlocked or locked, toggle
- **User Customization** – Individually customizable output mode and time
- **Hold Open** – Hold door open with card or app (customizable)
- **Secure, Integrated Bluetooth** – Passcode protected, AES 128 encryption
- **Authorized User Monitor** – Displays total number of users to guard against unauthorized additions
- **Two Ways to Unlock or Trigger a Device** – Card or app
- **Unlimited Devices** – Access/manage unlimited devices with one app
- **Easy Backup/Restore** – For off-device storage / restoration / replication
- **Wrong-Code Lockout and Tamper Alarm Output** – Customizable
- **Multilingual App Interface** – Currently supports English, Portuguese, Spanish, French, German, Russian, Vietnamese, and Chinese (Traditional or Simplified)

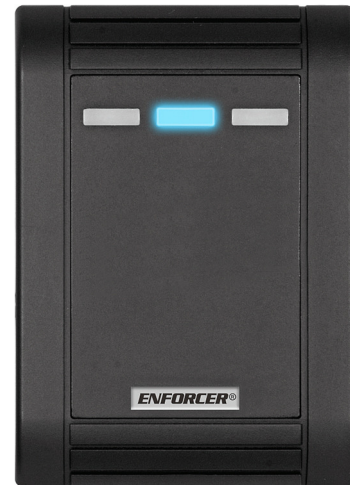

SL Access™ App:



App-Based Management and Control:





On-Device Security
AES 128 Encryption
Settings, passcodes kept on device, set by the Administrator

Administrator Settings
Set all device parameters, manage users, view audit trail, backup/restore

User Management
Add, view, import/export, customize individual settings, scheduling, output settings

Audit Trail
View most recent 1,000 events, searchable by user and type, and download for archive

Unlock with App
Users can unlock the door with the app, as well as with the proximity card



SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by SECO-LARM is under license. Other trademarks and trade names are those of their respective owners.



Copyright © 2021 SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI™


PL_PR-B1124-PQ_210812.docx

Specifications:


Access modes		App / proximity card
Users		1,000 users / 1 administrator
Current draw	Standby	63mA@12VDC, 36mA@24VDC
	Active (max.)	80mA@12VDC, 45mA@24VDC
Outputs	Relay	Solid state, form C, 2.5A@30VDC
	Tamper	50mA@30VDC
Output modes		Timed relock (1~1,800s), continually locked, continually unlocked, toggle
Inputs	Egress	N.O. Ground
	Door sensor	N.C. Ground

Operating voltage	9~25 VDC
Electrical protection	Short circuit, electro static discharge, reverse polarity, relay contact protection
Proximity reader	EM 125kHz
Bluetooth radio	Bluetooth Low Energy (BLE) 4.2
IP Rating	IP65 Weather resistant
Enclosure material	ABS Plastic
Operating temperature	-4°~122° F (-20°~50° C)
Weight	6.3-oz (180g)

Two Ways to Unlock or Trigger a Device:

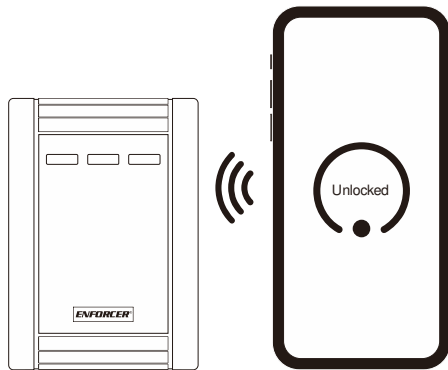


Unlock with the app



Unlock with a proximity card

Dimensions:

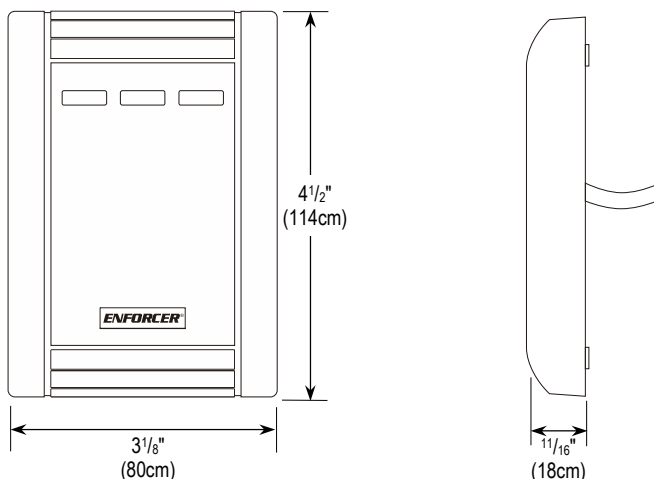

Download the SL Access™ App:



iOS 11.0 and higher



Android 5.0 and higher

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com

The Bluetooth® word mark and logos are registered trademarks owned by Bluetooth SIG, Inc. and any use of such marks by SECO-LARM is under license. Other trademarks and trade names are those of their respective owners.



Copyright © 2021 SECO-LARM U.S.A., Inc. All rights reserved.

All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI™

PL_PR-B1124-PQ_210812.docx