




# INSTALLATION TEMPLATE FOR ENFORCER DOOR CLOSER



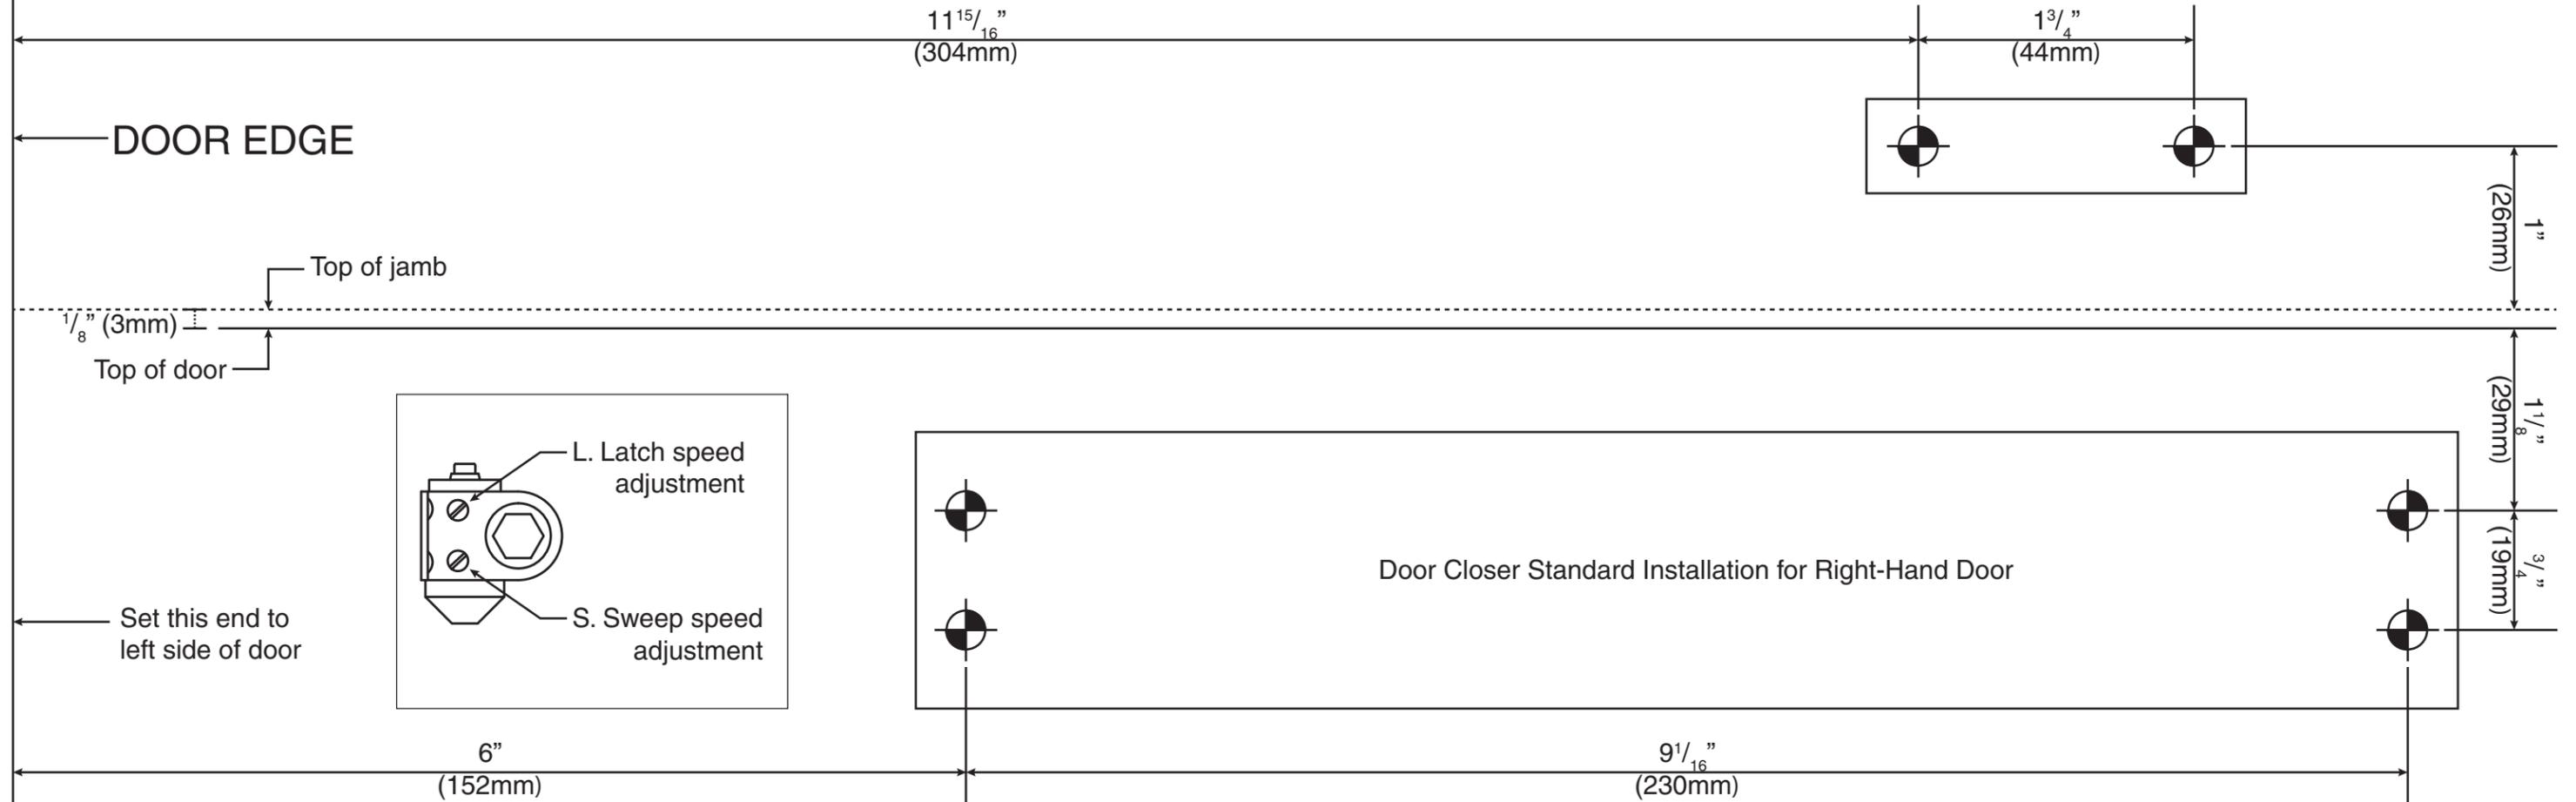


- Parts List:**
- 8x Philips head wood screw (ST6.3\*38)
  - 8x Philips head wood screw (ST6.3\*30)
  - 4x Philips head machine screw (1/4-20\*25)
  - 4x Philips head machine screw (1/4-20\*16)
  - 1x Arm axle screw (M6\*10)
  - 1x Philips pan head screw (M6\*10)
  - 1x Split washer
  - 1x Washer
  - 1x Hex wrench (4mm)
  - 1x Axle cover cap
  - 1x Parallel arm bracket
  - 1x Closer body
  - 1x Closer arm

- Installation Tips:**
- To ease opening and closing of the door, you can "pre-load" the closer arm by using a wrench on the axle to move it by 45 degrees, so that the arm will not have to travel through the initial open sweep.
  - Adjust the "Back Check" (BC) setting so that the door will open smoothly to the full extent of the swing required.
  - Adjust the "Sweep" speed to have the door swing slowly.
  - Adjust the "Latch" speed to have the door swing the last few inches with enough force to latch.
  - Door closer comes preset as ANSI size "3".  
To change size:
 

1: 8 turns CCW	4: 5 turns CW
2: 4 turns CCW	5: 10 turns CW
3: No turns	6: 15 turns CW

CCW: Counterclockwise  
CW: Clockwise

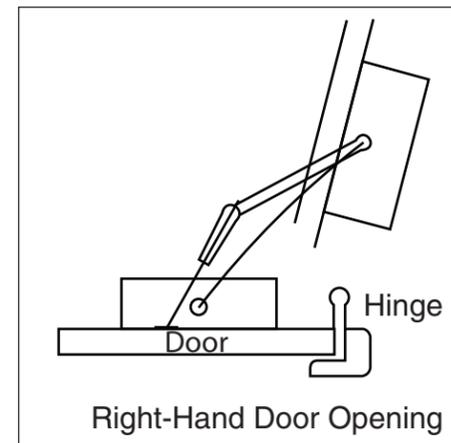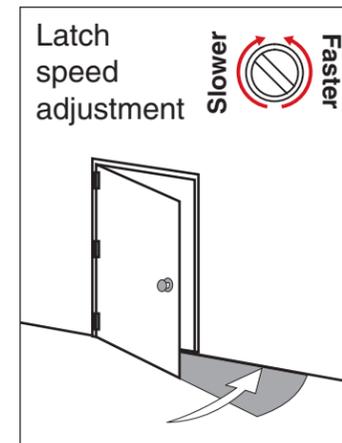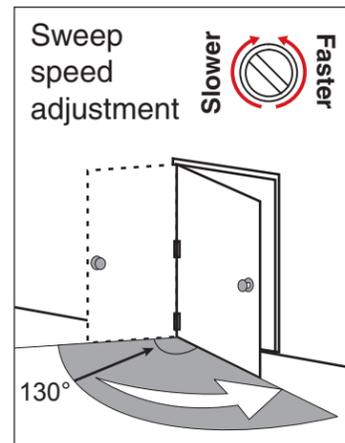

**Model: SD-C101-SGQ**  
**For Right-Hand Door**

**SECO-LARM**  
[www.seco-larm.com](http://www.seco-larm.com)