


Dimensions:

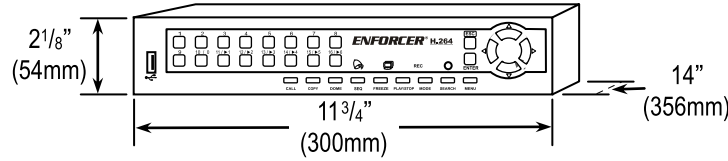

Specifications:

		DR-104Q* / DR-104-500Q	DR-108Q* / DR-108-500Q	DR-116Q* / DR-116-1.0TQ		
Video	Operating system	Embedded Linux				
	Inputs	BNCx4, 1.0Vp-p, 75Ω	BNCx8, 1.0Vp-p, 75Ω	BNCx16, 1.0Vp-p, 75Ω		
	Outputs	Main monitor	BNCx1, 1.0Vp-p, 75Ω			
		Call monitor	N/A	BNCx1, 1.0Vp-p, 75Ω		
	HDMI output	1024x768, 1280x1024, 1920x1080p				
VGA output	800x600, 1024x768, 1280x1024 pixels					
Audio	Input	RCAX4, Line-in	D-Sub, Line-in			
	Output	Main audio	RCAX1, Line-out			
		Call audio	N/A	RCAX1, Line-out		
	Data rate	8kb/s Per channel				
Recording & Storage	Compression method	H.264				
	Recording modes	Continuous, schedule, alarm, motion detection				
	Pre-alarm	Yes				
	Recording resolution & rate	NTSC	720x480	Max. 60PPS	Max. 60PPS	Max. 120PPS
			720x240	Max. 120PPS	Max. 120PPS	Max. 240PPS
			360x240	Max. 120PPS	Max. 240PPS	Max. 480PPS
		PAL	720x576	Max. 50PPS	Max. 50PPS	Max. 100PPS
			720x288	Max. 100PPS	Max. 100PPS	Max. 200PPS
	360x288	Max. 100PPS	Max. 200PPS	Max. 400PPS		
	Recording quality	8 Presets levels, adjustable				
Image size	1kB to 22kb/Picture					
Storage mode	Linear/Circular					
Data lifetime	Yes (Programmable)					
Built-in storage interface	2x SATA (4TB max.)					
HDD Capacity	500GB*		1TB*			
Export	USB 2.0 Port – Supports flash, DVD/RW drive or external USB HDD					
Alarm	Alarm input	x4 via, D-Sub (TTL)	x8 via, D-Sub (TTL)	x16 via, D-Sub (TTL)		
	Alarm relay output	x1, D-Sub, 1.0A@30VDC				
	Alarm detection	NO/NC, Programmable				
	Motion detection	16x12 Grid array, sensitivity, trigger level adjustable				
	Video loss detection	Programmable				
Connectivity	Network connectivity	RJ-45, 10/100Mbps Ethernet, static IP, DHCP, PPPoE, and DDNS				
	Remote control software	Mac®, Java™, CMS, IE 6/7/8				
	Remote operation	Monitoring, playback, recording, system setup, dome camera control, archiving				
	Mobile viewing	iPhone®, Android™, Window Mobile®, Symbian™, BlackBerry™				
	RS-485	D-Sub				
	IR Remote	Yes				
	Dome camera control protocol	Pelco P, Pelco D, AD422, Fastrax 2, Panasonic, GE, DSCP, JVC				
USB	1x USB 2.0 (Exporting, USB Mouse); 1x PS/2-compatible USB port (PS/2 mouse)					
General	Dimensions (WxHxD)	11 3/4" x 2 1/8" x 1 1/2" (300 x 54 x 38mm)				
	Weight	Approximately 10-lb (4.5kg)				
	Operating temperature	32°~104° F (0°~40° C)				
	Relative humidity	10%~90% Non-condensing				
Power Adapter	AC 100~240V, 50-60Hz, 60W adapter (included)					

*DR-104Q, DR-108Q, and DR-116Q DVR models are available with the same specifications but without a pre-installed hard drive.

SECO-LARM

16842 Millikan Avenue
Irvine, CA 92606

Tel: 1-949-261-2999

1-800-662-0800

Fax: 1-949-261-7326

Web: www.seco-larm.com

Email: info@seco-larm.com



Copyright © 2011
SECO-LARM U.S.A., Inc.
All rights reserved