

3-Channel RF Receiver & Transmitter

SK-919TP3JRUQ 3-Button RF Transmitter

- Range: Up to 500ft (152m)
- Seven channels
- LED transmission indicator
- Attractive slimline design
- Over 68 billion possible codes
- Includes 12VDC alkaline battery
- Compatible with all 315MHz SECO-LARM receivers




SK-910R3Q 3-Channel RF Receiver

- Controls garage doors, gates, house lights, alarm panels, or other devices via remote
- Range: Up to 500ft (152m)
- One LED per channel indicates RF reception, learn mode, transmitter learned, memory cleared, output type
- Flexible operating voltage: 11~24 VAC/VDC
- Three Form C dry relay outputs (NO/NC/COM), maximum 10A@24VDC.
- Programmable independent outputs: Timed, momentary (1, 2, 3, 4, 5, 10, 30, or 60 sec.), toggle (ON/OFF), latched, validity
- Compatible with all 315MHz SECO-LARM transmitters




Sample Applications:

Typical N.C. Application

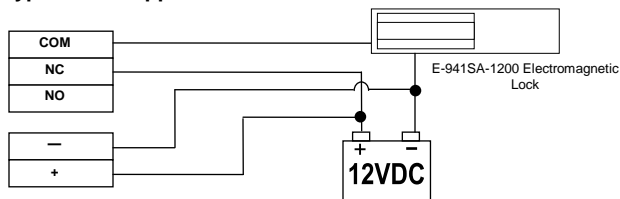

Typical N.O. Application

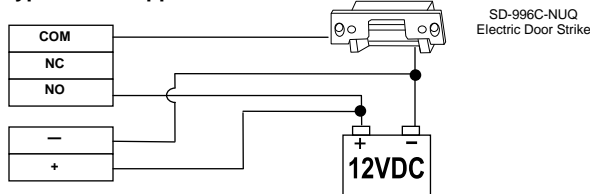

Increase range up to 1,000ft (304m) with SECO-LARM's Extended Range Antenna (SK-91ERSD)

Specifications:

Receiver

| | | |
|----------------------|---|------------------------|
| Model | SK-910R3Q | |
| Operating frequency | 315MHz | |
| Memory capacity | 15 transmitter button codes per channel | |
| Operating voltage | 11~24 VAC/VDC | |
| Operating current | Standby | 12mA@12VDC |
| | Active | 50mA@12VDC per channel |
| Relay contact rating | Form C 10A@24VDC or 120VAC per channel | |
| Connectors | Screw terminals, +, -, with NO/NC/COM per channel | |
| Dimensions | 5.3"x3.9"x1.1" (135x100x27.5mm) | |

SECO-LARM

16842 Millikan Ave • Irvine, CA 92606

Tel: 949-261-2999 / 800-662-0800 • Fax: 949-261-7326

sales@seco-larm.com • www.seco-larm.com



Copyright 2012 © SECO-LARM U.S.A, Inc. All rights reserved. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® CRIMEBUSTER® CBA® SLI®

piSK-910R3Q