

# Dome Cameras

**EV-1223C12Q** 4.3mm Lens Color Dome Camera

**EV-122C-2Q** 2.9mm Lens Color Dome Camera

**EV-122B-4Q** 4.3mm Lens Black & White Dome Camera



Color & B/W Available  
Sony Color CCD  
A1 Pro B/W CCD

Multi-Axis  
Gimbal

2 Lens  
Size  
Options

12  
VDC

- SECO-LARM offers both Black & White and Color Dome Cameras for use in those applications which require an attractive, inconspicuous look. The lens is mounted on a multi-axis gimbal bracket, making the camera ideal for wall-mounting or ceiling mounting. SECO-LARM dome cameras offer high resolution with low lux in a compact and durable enclosure.

## VB-CN1Q Corner Mounting Bracket


NEW

- Use with:  
**EV-1223C12Q**  
**EV-122C-2Q**  
**EV-122B-4Q**




## For Ceiling or Wall Mounting

Now with multi axis gimbal bracket for ceiling or wall mounting (see below for details.)

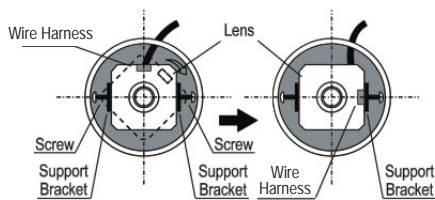

For wall mounting. Remove the 2 screws and turn the lens 90° clockwise until the wire harness is adjacent to the support bracket, then replace the 2 screws to secure it.

## Dimensions:

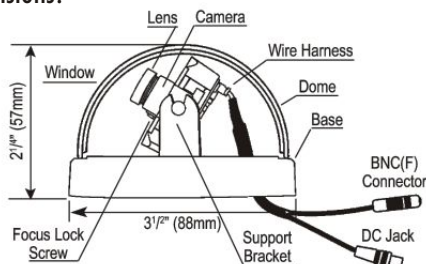

Specifications	EV-1223C12Q	EV-122C-2Q	EV-122B-4Q
Video output format	(NTSC)		(EIA)
Type	Color Dome Cameras		Black and White Dome Camera
Chip	1/3" CCD, Sony		1/3" CCD, A1 PROs
Resolution	420 TV lines		420 TV lines
Pickup elements	512 x 492 pixels		512 x 492 pixels
Scanning system	2:1 interlace		2:1 interlace
Sync	Internal		Internal
Video output	1 Vpp composite output, 75 ohms		1 Vpp composite output, 75 ohms
Lens	4.3mm	2.9mm	4.3mm
Minimum illumination	0.1 lux		0.1 lux
Gamma correction	0.45		0.45
S/N ratio	> 48dB		> 48dB
Shutter control	Auto, 1/60~1/100,000 sec.		Auto, 1/60~1/100,000 sec.
Backlight compensation	Auto & Manual		Auto & Manual
Gain control	Auto		Auto
Operating Voltage	12VDC 10%		12VDC 10%
Current Draw	110mA		100mA
Ambient temperature	14 ~140 F ( 10 ~60 C)		14 ~140 F ( 10 ~60 C)
White Balance	Auto		Auto
Dimensions	3 1/2" x 2 1/4" (88 x 57 mm)		3 1/2" x 2 1/4" (88 x 57 mm)
Weight	4.2 oz. (118g)		4.2 oz. (118g)