


16-Port Rack- or Wall-Mount Active Balun Hub

EVT-AH16-4T2Q - 16-Port Active Balun Hub, Range: Up to 8,000 ft. (2,400 m)

NEW



- Connects up to 16 CCTV cameras to a central location using low-cost Cat5e/6 UTP cable.
- Video In: 16 (terminal block).
- Video Out: 32 (BNC connector).
- Works in conjunction with passive or active video baluns.
- Range with Passive Balun:
 - B/W 4,100 ft. (1,200 m)
 - Color 3,200 ft. (1,000 m).
- Range with Active Balun:
 - B/W 8,000 ft. (2,400 m)
 - Color 5,000 ft. (1,500 m).
- Works with full-motion CCTV cameras up to 8,000 ft. (2,400 m) away via active video baluns.
- Feeds the camera signals to nearly any standard video multiplexor or switcher or digital video recorder via coax cables.
- Compact enclosure, only 1U (1 3/4 inches) high.
- Rack-Mount, Wall-Mount, or stackable.
- Mounts in a standard 19-inch rack.
- High immunity from interference - built-in impedance coupled device and noise filter.
- Power input: 12VDC.
- Power consumption: 500mA.

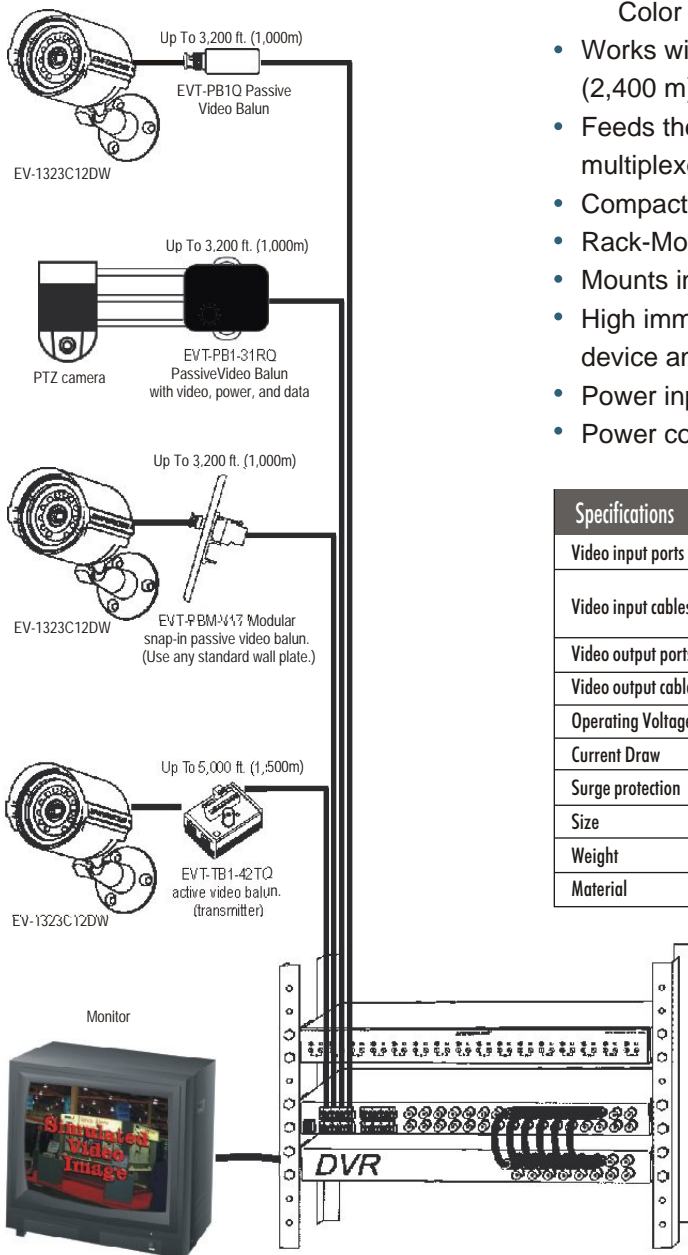

| Specifications | |
|---------------------|--|
| Video input ports | 16 x 2 wire ports on removable terminal blocks |
| Video input cables | Unshielded twisted pair (UTP), min. Cat2. Use Cat5e or better for best range and video signal. |
| Video output ports | 32 x BNC connectors, each 1Vpp, 75 ohms. |
| Video output cables | Coax. |
| Operating Voltage | 12VDC |
| Current Draw | 500 mA |
| Surge protection | Video |
| Size | 1U form factor, 17 1/4" x 6 3/4" x 1 3/4" (482 x 170 x 44 mm) |
| Weight | 4.9 lb. (2.2kg) |
| Material | Steel cabinet, black matte finish. |