

6-in-1 Multi-Purpose 12VDC Tester

ST-BT02Q

Tests: Voltage, Load, Polarity, Voltage Drop, PTC Fuse, Continuity

Features:

- Performs 6 essential tests in the field:
 - **Continuity Testing:** Check the continuity of a circuit, wire run, or dry contact
 - **Voltage Testing:** Check the voltage of power sources in the field without a multimeter
 - **Load Testing:** Apply a simulated 1A or 500mA load to power sources to check the voltage under load
 - **Polarity Testing:** Check polarity of wires using the illuminated power connector
 - **Voltage Drop Testing:** Check the amount of voltage drop over long cable runs
 - **PTC Fuse Testing:** Check the integrity of PTC fuses
- Strength indication LEDs help test Load, Voltage, and PTC Fuses
- Selectable load: 0.5A or 1A to test wiring depending on location, device to be tested, and anticipated voltage drop
- Illuminated power connector: Clearly displays voltage polarity
- Overheat indicator
- Alligator clips included




Specifications:


Operating voltage		5~12 VDC
Maximum load		0.5 / 1 A (switch selectable)
Power	Continuity	3VDC CR1220 Battery (included)
	All other tests	Passive: No power required
Weight		1.4-oz (40g)
Dimensions		2"x1 ³ / ₄ "x1 ¹ / ₈ " (51x44x29 mm)

Performs 6 Essential Tests in the Field:


Continuity Testing



Voltage, Load, Polarity, and PTC Fuse Testing

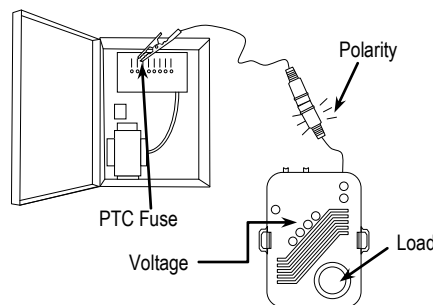

Voltage Drop Testing

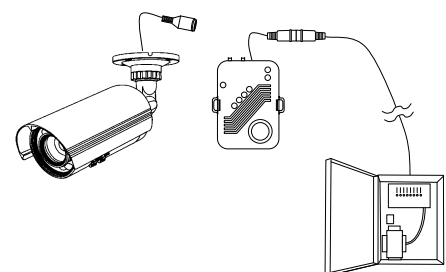

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2017 SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PI_ST-BT02Q_170608.docx