

# 2-Channel RF Transmitters & Receivers



**SK-919TD2A-UP** 2-Button Transmitter, Fixed-Code, Coded

**SK-919TD2A-U** 2-Button Transmitter, Fixed-Code, Uncoded

**SK-917T2A-U** 2-Button, CODEBUMP™ Transmitter



2 1/4" x 1 1/4" x 1/2"  
(57 x 32 x 12 mm)

With SECO-LARM's Patented CODEBUMP™ anti-codegrabbing technology, the transmitter's code changes to one of 18 quintillion ( $1.8 \times 10^{19}$ ) possible codes every time the transmitter button is pressed.

- Operates up to 500 feet. 315MHz.
- Over 68 billion ( $6.8 \times 10^{10}$ ) possible codes.
- LED transmission indicator.
- Includes 12VDC alkaline battery.
- Compatible with all SECO-LARM receivers.
- FCC certified.

**SK-919TD2A-U:** Same as SK-919TD2A-UP, but uncoded.

**SK-917T2A-U:** Similar to SK-919TD2A-UP, but with Patented CODEBUMP™ anti-codegrabbing technology and 18 quintillion codes.

**SK-939TS2A-UP:** Same as SK-919TD2A-UP, but 433.39MHz.

Hand-Held Transmitters: See page 9.

**SK-910R2** 2-Channel Receiver (11 to 24 VAC/VDC)




3 1/4" x 3 3/8" x 1 1/8"  
(83 x 85 x 28 mm)

3~13.8 VDC receivers  
also available.  
See page 6

- Control garage doors, house lights, alarm panels, or other devices via remote control.
- Compatible with all SECO-LARM transmitters (fixed-code and CodeBump™).
- 2 LEDs indicate RF reception, learn mode entered, transmitter learned, memory cleared.
- 2 Mode switches for easy transmitter learning.

**SK-910R2-4:** Same as SK-910R2, but 433.39MHz.  
Specification/Comparison Chart: See page 5.

**SK-91ERSD** Dipole Extended Range Antenna

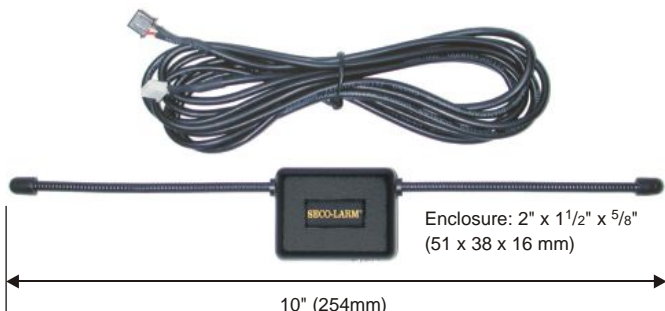

Enclosure: 2" x 1 1/2" x 5/8"  
(51 x 38 x 16 mm)

10" (254mm)

- Extends receiver range to up to 1,000 feet.
- Extends range for these SECO-LARM receivers:
  - SK-910R 1-channel receiver
  - SK-910R2 2-channel receiver
  - SK-910R4 4-channel receiver
  - SK-910RA 1-channel receiver
- Plugs into motherboard connector on receiver.
- Includes 9-ft. cable.