

AC Power Supply for CCTV Cameras

EVP-1SA4P4UL 4 Outputs @ 24VAC (4 Amps*)
 EVP-1SA4P9UL 9 Outputs @ 24VAC (4 Amps*)
 EVP-1SA8P16UL 16 Outputs @ 24VAC (8 Amps*)



* Max total continuous output current, each channel output is fused at 1.1 Amp.

The ENFORCER CCTV Power Supplies centralize the power sources for multiple AC-powered CCTV cameras and/or CCTV accessories. The power input, power transformer, and all fused power outputs are enclosed in one heavy-duty, easy-to-install enclosure.



EVP-1SA4P9UL shown

Features:

- ▶ Each output individually fused (PTC** type fuses).
- ▶ Output fuses rated 1.1 Amps @ 250VAC.
- ▶ Individual red LED status indicator for each output.
- ▶ Main power switch to turn on/off power to outputs


Power

- ▶ Input: 110VAC, 60Hz. Output: 24VAC.
- ▶ UL-approved power transformer.
- ▶ Total output current:
 4.0 Amps (EVP-1SA4P4UL, EVP-1SA4P9UL)
 8.0 Amps (EVP-1SA8P16UL).
- ▶ Main fuse rated 5.0 Amps @ 250VAC.
- ▶ Spare fuse and 6-foot power cord included.

Enclosure

- ▶ Heavy-duty steel case to protect the power connections.
- ▶ Removable steel cover for easy access to power connections.
- ▶ Ventilation holes to prevent heat build-up.
- ▶ Dimensions - 10" x 7³/₄" x 3¹/₂"
- ▶ Knock-out on the cover for optional cam lock.
- ▶ AC terminal block for easy connection from transformer to 6-foot power cord.

Connections:

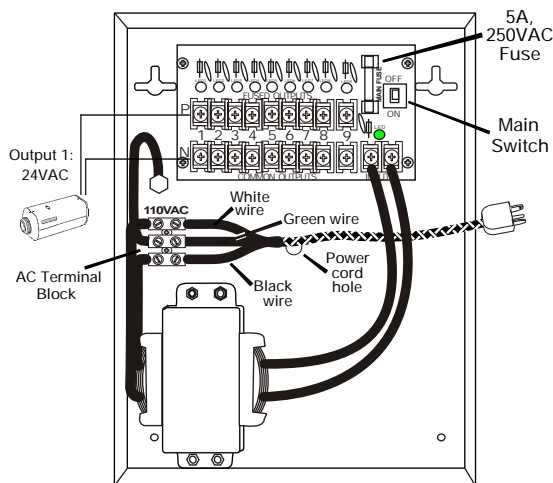

(EVP-1SA4P9UL shown)

Specifications:

	EVP-1SA4P4UL	EVP-1SA4P9UL	EVP-1SA8P16UL
Number of Outputs	4	9	16
Total Output Current	4 Amps*	4 Amps*	8 Amps*
Main Fuse Rating	5.0 Amps @ 250VAC		
Output Fuse Rating	1.1 Amps @ 250VAC		

Copyright 2007 SECO-LARM U.S.A., Inc. All rights reserved.

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.