

ENFORCER®


Sensors

E-931CS22RRC Entry Alert System – Range: 22 ft. (7m)



- ▶ For monitoring an entrance, or use as an entrance indicator.
- ▶ Photoelectric beam sensor.
- ▶ Range: Up to 22 feet (7m)
- ▶ Makes “ding-dong” or siren sound if beam is interrupted.
- ▶ Speaker volume can be adjusted or turned off.
- ▶ In siren mode, sounding time adjustable from 3 to 30 seconds.
- ▶ 9VDC adaptor included.
- ▶ All components plug into each other. No hard wiring required.
- ▶ Includes the following:
 - Retro-reflective photoelectric sensor.
 - Reflector.
 - Speaker/electronic chime.
 - 9VDC 200mA power adaptor.
 - Mounting brackets for sensor, reflector and chime.

WIRING:

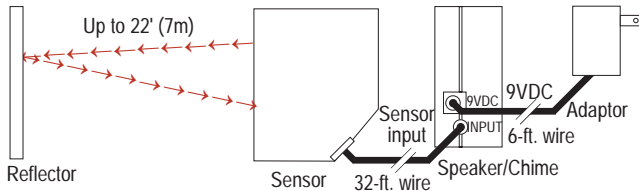

ACCESSORIES

E-931CS22RRC Counter

- ▶ Automatically tracks how often the E-931CS22RRC is triggered.
- ▶ Push buttons to manually add to or subtract from counter, or to reset to zero.
- ▶ Plugs into speaker - no wiring needed.
- ▶ Mounting bracket included.



E-931ACC-S Speaker

- ▶ Additional speaker / electronic chime.
- ▶ Use any standard stereo cord with 1/8" stereo plug.



SPECIFICATIONS:

	E-931CS22RRC
Type	Retro-Reflective
Sensing Range	22' (7m)
Supply Voltage	9VDC adaptor included
Total Current Consumption	100mA Max.
Stand-by Current	25mA
Ambient Temperature	-4° ~ 122° F (-20° ~ 50° C)
Speaker Response Time	Chime: ~1 sec., Alarm: 30 sec.
Speaker Volume	Adjustable from 0 ~ max.
Alarm Time Range	Adjustable 3-30sec. for alarm
Speaker Output	Chime/Off/Alarm (Select by switch)
Mounting Brackets	3 included

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® U.S.A., Inc.
16842 Millikan Avenue, Irvine, CA 92606

Tel: 1-800-662-0800 (Domestic U.S. & Canada) Tel: 1-949-261-2999 (California & international)

Fax: 1-949-261-7326 Email: info@seco-larm.com Website: www.seco-larm.com

E-931-CS22RRC.pmd

Copyright © 2004 SECO-LARM U.S.A., Inc.