

ENFORCER®


Access

Double Door Maglock, with status monitor & 1200 lbs. (545 kg.) holding force per door

Model: E-941DA-1K2P


Features:

- ▶ Available in anodized aluminum housing (US 28).
- ▶ Dual voltage: 12 or 24 VDC (selectable).
- ▶ No residual magnetism.
- ▶ Detachable faceplate.
- ▶ Adjustable mounting bracket.
- ▶ Two (one per side) built-in status sensor relay outputs.
- ▶ Two (one per side) Built-in 2-color status LED.
- ▶ MOV surge protection.
- ▶ Complete mounting hardware included.
- ▶ "L" brackets and "Z" brackets available for easy mounting.

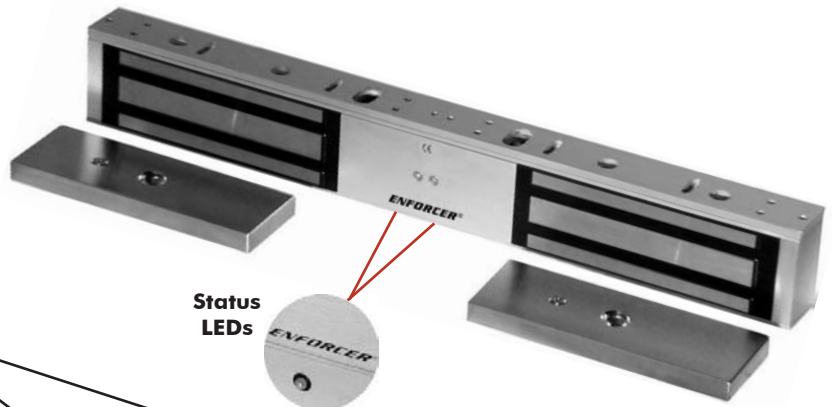


DIMENSIONS

E-941DA-1K2P

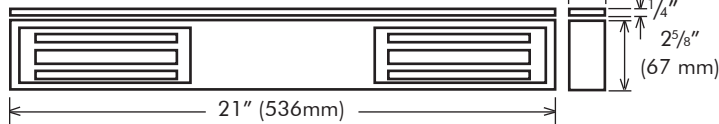

Armature Plate

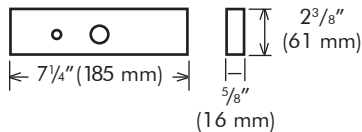

Status Sensor Outputs

Monitor whether the protected door is open or closed.

- N.C. — Door opened, red LED on.
- N.O. — Door closed, green LED on.
- Relay — 3A @ 12VDC.

Status LED

- Green — Locked
- Red — Unlocked
- Off — No power


SPECIFICATIONS:



	E-941DA-1K2P
Operating Voltage	12 or 24VDC
Holding Force	1200lbs. (545kg)/dr.
Current Draw	500mA @ 12VDC/dr. 250mA @ 24VDC/dr.
Voltage Tolerance	±10%
Temperature	14°~131° F (-10°~55° C)
Status Sensor	SPDT Relay: 2A@12VDC:
Status LED (2-Color)	Locked (Green), Unlocked (Red)
Weight (Approx.)	21lbs. (10kg)

INSTALLATION:

Note: one half of the E-941DA-1K2P is shown here. The other half would also have a PC board with status LED and status sensor outputs.

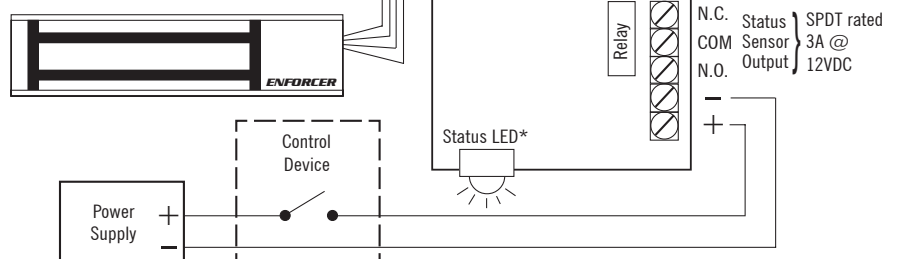

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.