

# ENFORCER®

## Mini Strobe Siren

SL-1312-SA/x

Manual



SL-1312-SA/R shown



- Synchronized piezo siren and long-life LEDs (x4)
- Surface-mount or mount to single-gang box
- High-impact plastic casing and weather-resistant design allows for indoor and outdoor use
- Available with amber, blue, clear, or red lens
- Simple 2-wire connection: red to positive, black to negative
- Alarm siren sound is 100dB@3ft (1m) at 12VDC

### Parts List

- |                      |                    |
|----------------------|--------------------|
| 1x Mini Strobe Siren | 2x Mounting screws |
| 2x Wall anchors      | 1x Manual          |


### Ordering Guide

Color	Model	Color	Model
Amber	SL-1312-SA/A	Blue	SL-1312-SA/B
Clear	SL-1312-SA/C	Red	SL-1312-SA/R

### Specifications

Lens color	Amber, Blue, Clear, or Red
Rated voltage	12VDC
Operating Voltage	6~15 VDC
Current draw	60mA@12VDC
Flashing speed	360~480 per min (not adjustable)
Siren	Piezo, 100dB@3ft (1m) at 12VDC
Connections	Red to positive
	Black to negative
Electrical protection	Reverse polarity protection
Operating temperature	-4°~158° F (-20°~70° C)
Dimensions	2 7/8" x 4 7/8" x 1 7/8" (73x123x47 mm)

### Mounting Holes / Wiring Locations

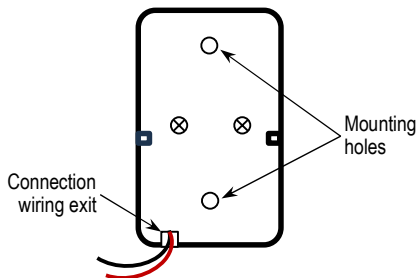

### Installation

1. Consider the type of mounting and where to run the wires. The two connection wires exit the device from the lower part of the device back but also with a notch at the bottom to allow for hidden or exposed wiring.
2. Run two wires from an N.C. output of the triggering device to the Mini Strobe Siren installation location.
3. For surface mounting, mark and drill the mounting holes and holes for the wiring if needed.  
**NOTE:** The Mini Strobe Siren mounting holes are spaced so that it can also be mounted to a standard single-gang back box.
4. Connect the red wire to the positive trigger and the black wire to the negative trigger wire.
5. Use the included mounting screws (and plastic wall anchors if needed) to mount the device taking care not to crimp the wires.

**California Proposition 65 Warning:** These products may contain chemicals which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).


**WARRANTY:** This SECO-LARM product is warranted against defects in material and workmanship while used in normal service for one (1) year from the date of sale to the original customer. SECO-LARM's obligation is limited to the repair or replacement of any defective part if the unit is returned, transportation prepaid, to SECO-LARM. This Warranty is void if damage is caused by or attributed to acts of God, physical or electrical misuse or abuse, neglect, repair or alteration, improper or abnormal usage, or faulty installation, or if for any other reason SECO-LARM determines that such equipment is not operating properly as a result of causes other than defects in material and workmanship. The sole obligation of SECO-LARM and the purchaser's exclusive remedy, shall be limited to the replacement or repair only, at SECO-LARM's option. In no event shall SECO-LARM be liable for any special, collateral, incidental, or consequential personal or property damage of any kind to the purchaser or anyone else.

**NOTICE:** The SECO-LARM policy is one of continual development and improvement. For that reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is also not responsible for misprints. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. Copyright © 2025 SECO-LARM U.S.A., Inc. All rights reserved.

## SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606  
Phone: (949) 261-2999 | (800) 662-0800

Website: [www.seco-larm.com](http://www.seco-larm.com)  
Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)



MI\_SL-1312-SA\_250514.docx