

## Elite Series

# Wide Dynamic Range (WDR) Vandal-Resistant Color Dome Camera

**EV-2625-NKEQ** 2.8~11.0mm Varifocal Lens, Digital Noise Reduction, Digital Slow Shutter

*The ENFORCER EV-2625-NKEQ protects areas in difficult lighting conditions where other cameras cannot. Locations with lighting difficulties such as extreme overexposure or underexposure can be clearly seen with the EV-2625-NKEQ.*


### Features:

- ▶ 1/3" Pixim DPS Image Sensor
- ▶ 540 TV lines for high resolution
- ▶ Digital Slow Shutter (DSS) up to X32
- ▶ Digital Noise Reduction (DNR)
- ▶ On-screen display with included remote control
- ▶ Varifocal lens can cover a wide area or focus in on a specific target
- ▶ 360° triple-axis rotation
- ▶ Vandal-resistant and weatherproof
- ▶ Easy adjustment of focus and zoom
- ▶ Dual Voltage: 12VDC or 24VAC
- ▶ Service monitor port
- ▶ Ceiling and Wall Mounts available
- ▶ Programmable backlight compensation zones and mirror mode



Flush or surface mountable!

Typical Underexposure

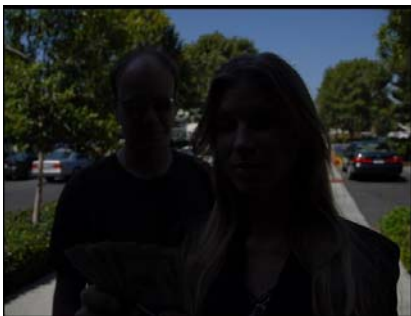


DIGITAL  
**PIXEL**  
SYSTEM  
FROM PIXIM

EV-2625-NKEQ  
Wide Dynamic Range (WDR)



## On-screen Display and Included Remote Control:

The on-screen display can program the camera for almost any lighting condition. Using the included remote control, adjustments can be made to the WDR, digital noise reduction, and digital slow shutter to show crisp, clear images regardless of the lighting.



On-Screen Display  
Main Menu



Included Remote Control

## Specifications:

Image sensor	1/3" Pixim DPS Image Sensor
Resolution	540 TV lines
Pickup elements	720 x 540 pixels
Lens	f = 2.8 ~ 11 mm varifocal, F1.2 DC auto iris
Wide dynamic range (WDR)	Normal - 102dB, Max. - 120dB
Digital slow shutter (DSS)	OFF, ON: 2x ~ 32x
On-screen display (OSD)	Built-in
Digital noise reduction	ON/OFF
Sync	Internal
Shutter speed	1/60 ~ 1/30, 720 secs.
Iris control	DC auto iris
Gain control	Auto
White balance	ATW / AWC / Manual
Video output	1 Vp-p composite output, 75 Ohms.
S/N ratio	> 50dB (AGC off)
Power source (+/-10%)	24VAC or 12VDC
Ambient temperature	14° ~ 122° F (-10° ~ 50° C)
Varifocal lens	2.8 ~ 11.0 mm
Minimum illumination	0.4 Lux color, 0.08 Lux DSS ON
Power consumption @ 24VAC	Max. 4.8VA
Power consumption @ 12VDC	Max: 240mA
Weight	4 lbs. 6 oz. (2.0 kg)

## Other Models Available:



**Day Night**

**EV-2605-NKEQ**

- ▶ True Day/Night Operation
- ▶ 1/3" Sony Super HAD
- ▶ 550 TV Lines
- ▶ Mechanical IR cut filter



**Day Night**

**EV-2606-NJEQ**

- ▶ 36 IR LEDs
- ▶ 1/3" Sony Super HAD
- ▶ 550 TV Lines
- ▶ Mechanical IR cut filter



**DNR**

**EV-2615-NKEQ**

- ▶ Digital Noise Reduction
- ▶ 1/3" Sony Super HAD
- ▶ 520 TV Lines
- ▶ On-screen display