

Fingerprint Reader and Keypad

SK-2612-SFSQ

The ENFORCER Fingerprint Reader and Keypad is an advanced security solution that offers both efficiency and convenience. This versatile device can function as a stand-alone controller or a Wiegand reader.

Features

- 12VDC Operation
- Low current draw – 210mA max.
- Form C relay output – 2A@12VDC
- Adjustable output – 1~99 seconds or toggle
- Built-in tamper alarm and external alarm output
- Up to 1,000 users
- Door-propped-open / door-forced open alarm
- Outdoor rated – IP66 weatherproof
- Can serve as Wiegand reader, output – 26~37 bits
- 2-Door interlock
- 500 DPI Optical fingerprint reader with illuminated fingerprint window
- Fingerprint identification time – ≤1 second
- Fingerprint false acceptance rate – ≤0.01%
- Fingerprint false rejection rate – ≤0.1%



Anti-Vandal

12VDC


IP66

1,000 Users

Specifications

Operating voltage		12VDC
Current draw	Standby	60mA@12VDC
	Active	210mA@12VDC (max.)
Outputs	Form C	2A@12VDC
	Alarm	Transistor ground, 2A@12VDC
	Wiegand	Wiegand 26~37 bits
Inputs	Wiegand	26~37 bits, PIN input – 4, 8, or 10 bits
	Egress	N.O. Ground
	Door Sensor	N.C. Ground
Enclosure material		Zinc alloy
Operating temperature		-40°~140° F (-40°~60° C)
Operating humidity		20~90% non-condensing
Dimensions		2 1/4"x5 3/8"x1" (58x137x26 mm)
Weight		14.2-oz (400g)

Overview

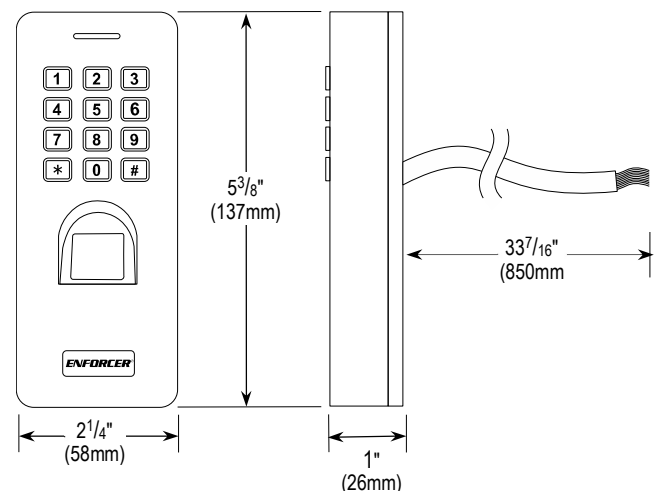

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2025 SECO-LARM U.S.A., Inc. All rights reserved.
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PI_SK-2612-SFSQ_241106_ML.docx

Lector de Huellas Dactilares y Teclado

SK-2612-SFSQ

El Lector de Huellas Dactilares y Teclado ENFORCER es una solución de seguridad avanzada que ofrece tanto eficiencia como conveniencia. Este dispositivo versátil puede funcionar como un controlador independiente o como un lector Wiegand.

Funciones

- Operación a 12VDC
- Bajo consumo de corriente – 210mA máx.
- Salida de relé de forma C – 2A@12VDC
- Salida ajustable – 1~99 segundos o alternar
- Alarma de manipulación incorporada y salida de alarma externa
- Hasta 1,000 usuarios
- Alarma de puerta abierta / puerta forzada
- Clasificación para exteriores – IP66 a prueba de intemperie
- Puede funcionar como lector Wiegand, salida – 26~37 bits
- Interbloqueo de 2 puertas
- Lector de huellas dactilares óptico de 500 DPI con ventana de huellas dactilares iluminada
- Tiempo de identificación de huellas dactilares – ≤1 segundo
- Tasa de aceptación falsa de huellas dactilares – ≤0.01%
- Tasa de rechazo falso de huellas dactilares – ≤0.1%



Anti-vandálico

12VCC


IP66

1,000 Usuarios

Especificaciones

Voltaje de operación		12VDC
Consumo de corriente	En espera	60mA@12VDC
	Activo	210mA@12VDC (max.)
Salidas	Forma C	2A@12VDC
	Alarma	Tierra de transistor, 2A@12VDC
	Wiegand	Wiegand 26~37 bits
Entradas	Wiegand	26~37 bits, entrada de PIN – 4, 8, o 10 bits
	Salida	N.O. Tierra
	Sensor de puerta	N.C. Tierra
Material de la carcasa		Aleación de zinc
Temperatura de operación		-40°~140° F (-40°~60° C)
Humedad de operación		20~90% sin condensación
Dimensiones		2 1/4"x5 3/8"x1" (58x137x26 mm)
Peso		14.2-oz (400g)

Vista general

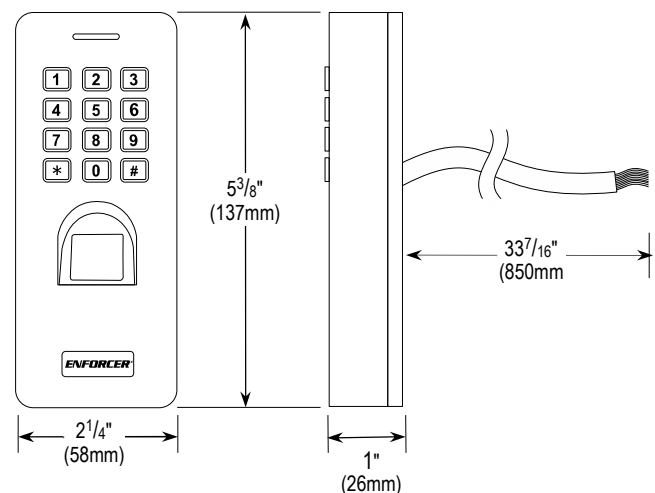

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Webseite: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2025 SECO-LARM U.S.A., Inc. Todos los derechos reservados.
Todas las marcas comerciales son propiedad de SECO-LARM U.S.A., Inc. o sus respectivos propietarios.
La política de SECO-LARM es de desarrollo y mejora continua. Por esa razón, SECO-LARM se reserva el derecho de cambiar las especificaciones y los precios sin previo aviso. SECO-LARM tampoco es responsable de errores de impresión.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI® 

PI_SK-2612-SFSQ_241106_ML.docx