

## Concealed-Terminal Surface-Mount Contacts

Please visit the SECO-LARM website [www.seco-larm.com](http://www.seco-larm.com) for complete installation instructions.  
Please read the manual before you begin the installation.

**SM-433-TQ/W** 1 1/4" (31mm) Gap, Closed Loop,  
Screw Terminals, White


**SM-433-TQ/B** 1 1/4" (31mm) Gap, Closed Loop,  
Screw Terminals, Brown



SM-433-TQ/W shown

### Features


- Surface-mount magnetic contacts
- Gold-plated terminals for longer expected life and reliability
- Screw terminals
- Cover hides mounting screws, terminal block, and wires
- Contact reed switch is SPST, iridium-plated to have a high melting point and Vickers hardness for higher power handling and longer expected life
- For closed loop circuits
- 1 1/4" (31mm) Gap
- Lifetime limited warranty



### Specifications

Model	SM-433-TQ/W	SM-433-TQ/B
Loop type	Closed loop	
Electrical configuration	N.O. (SPST)	
Connectors	Gold-plated screw terminals	
Color	White	Brown
Material	Case	High-impact ABS plastic
	Contacts	Iridium-plated
Contact rating	10W (max.)	
Operating temperature	-15°~160° F (-25°~70° C)	
Switch cycles	50 Million (0.1mA@5VDC)	
Switch dimensions	2"x9/16"x1/2" (51x14x13 mm)	
Magnet dimensions	2"x9/16"x1/2" (51x14x13 mm)	
Magnet type	Rare-earth neodymium	

### Dimensions

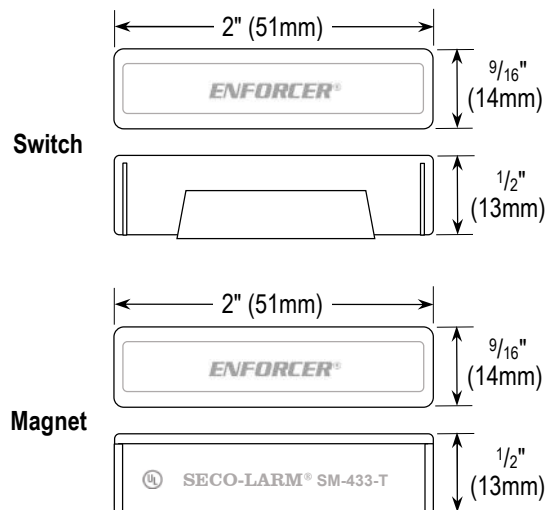

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)



Copyright © 2023 SECO-LARM U.S.A., Inc. All rights reserved.  
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.  
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

## Montaje Superficial de Terminal Oculta

Por favor visite el sitio web de SECO-LARM [www.seco-larm.com](http://www.seco-larm.com) para obtener instrucciones de instalación completas.  
Por favor lea el manual antes de usar el equipo.

**SM-433-TQ/W** 1 1/4" (31 mm) Brecha, Circuito Cerrado,  
Terminales de Tornillo, Blanco

**SM-433-TQ/B** 1 1/4" (31mm) Brecha, Circuito Cerrado,  
Terminales de Tornillo, Marrón



SM-433-TQ/W mostrado

### Funciones

- Contactos magnéticos de montaje en superficie
- Terminales chapados en oro para una vida útil y confiabilidad más prolongadas
- Terminales de tornillo
- La cubierta oculta los tornillos de montaje, el bloque de terminales y los cables.
- Interruptor de un solo polo tiro doble, chapado en iridio para tener un alto punto de fusión y dureza Vickers para un mayor manejo de la potencia y una vida útil más larga
- Para circuitos cerrados.
- 1 1/4" (31mm) brecha
- Garantía limitada de por vida



Contactos chapados en iridio

Imán de tierra poco común


Terminales de Tornillo

1 1/4" Brecha

### Especificaciones

Modelo	SM-433-TQ/W	SM-433-TQ/B
Tipo de Circuito	Circuito Cerrado	
Configuración eléctrica	N.O. (SPTD)	
Conectores	Terminales de tornillo dorados	
Color	Blanco	Marrón
Material	Cubierta	Plástico ABS de alto impacto
	Contactos	Chapado en iridio
Puntuación de contactos	10W (max.)	
Temperatura de funcionamiento	-15°~160° F (-25°~70° C)	
Ciclos de cambio	50 Millones (0.1mA@5V C.C.)	
Dimensiones del interruptor	2"x9/16"x1/2" (51x14x13 mm)	
Dimensiones del imán	2"x9/16"x1/2" (51x14x13 mm)	
Tipo de imán	Imán Neodimio de tierra poco común	

### Dimensiones

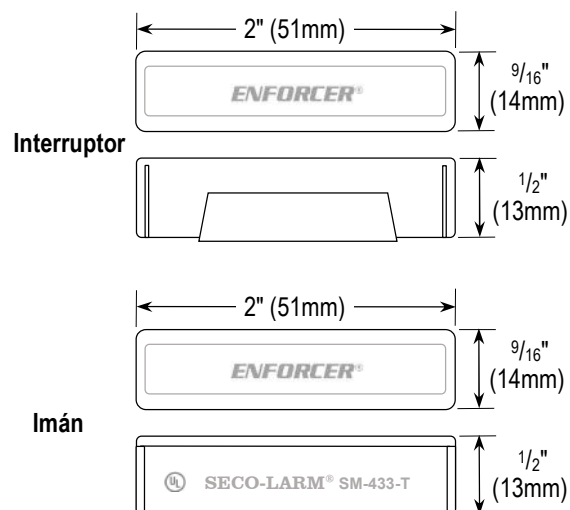

**SECO-LARM® U.S.A., Inc.**

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)

Copyright © 2023 SECO-LARM U.S.A., Inc. Todos los derechos reservados.  
Todas las marcas comerciales son propiedad de SECO-LARM U.S.A., Inc. o sus respectivos propietarios.  
La póliza de SECO-LARM es de desarrollo y mejora continua. Por esa razón, SECO-LARM se reserva el derecho de cambiar las especificaciones y los precios sin previo aviso. SECO-LARM tampoco es responsable de errores de impresión.  
**SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®**