

## Multi-Function Timer/Counter

### SA-025MQ

#### 7 Programmable Timer/Counter Modes

The ENFORCER SA-025MQ Multi-Function Programmable Timer saves time with 7 programmable modes for a variety of common situations. Settings are easily programmed using three pushbuttons and an LED display.

#### Features:


- 12~24VDC (auto-sensing) operation
- Low current draw
- 7 modes easily programmable with pushbuttons and LED display (auto door or gate closure, guard timer, pulse extender / false trigger avoidance, timed relay output, timed pulse relay output, input counter, input timer)
- Timer can be set to trigger a notification (red LED and/or buzzer) and/or a Form C relay output (10A@24VDC)
- Timer can be set from 1sec~11h 59min
- Can be triggered by N.O. pos. (+) or N.C. neg. (-) input, or by powering up the unit
- Relay can be programmed to trigger at the start or end of the timing cycle, or to toggle
- Relay can be programmed to pulse (0.5sec on / 0.5sec off) or steady on (1sec~11h 59min)
- Includes reset input (N.O.-) to manually reset cycle

#### Specifications:

Operating voltage		12~24VDC
Current draw	Standby	20~40mA@12/24VDC
	Active	65~100mA@12/24VDC (relay and buzzer activated)
Inputs	Trigger	N.O. positive (+) or N.C. negative (-)
	Reset	N.O. negative (-)
Output		10@24VDC NO/NC/COM Dry Form C relay
Audio / Visual Indicators	Display	For programming and status
	Red LED	Relay output indicator
	Buzzer	For programming and warning
Operating temperature		-40°~158° F (-40°~70° C)
Dimensions		2 <sup>11/16</sup> "x1 <sup>1/8</sup> "x3 <sup>1/4</sup> " (68x28x83 mm)
Weight		2.8-oz (79.2g)



#### Overview:

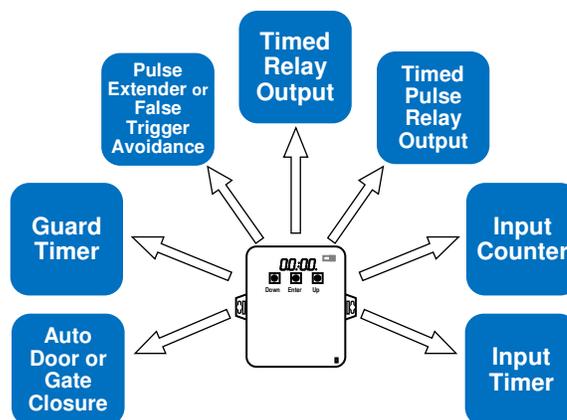

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2018 SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®