



Typical Receiver Applications:


Positive Output:

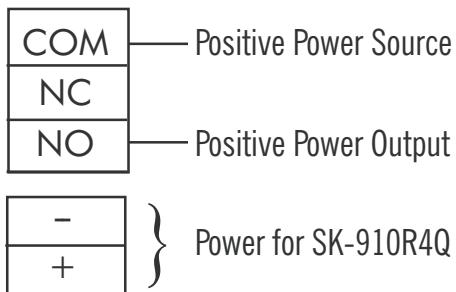


Negative Output:

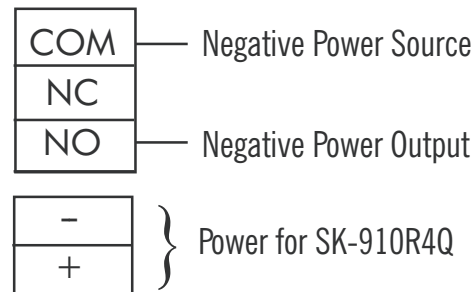

11~24 VAC/VDC power input, 24VAC output driving a motor:

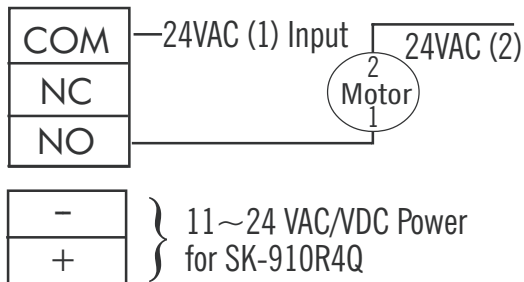


11~24 VAC/VDC power input, 24VDC output driving a motor:

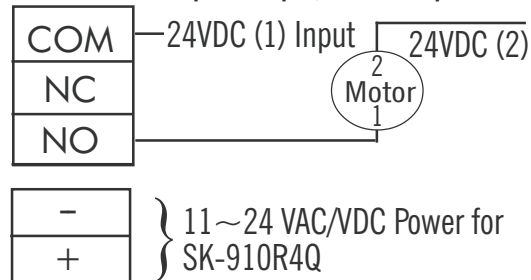

12VDC power input, 12VDC positive output:

Typical N.C. application (access control).

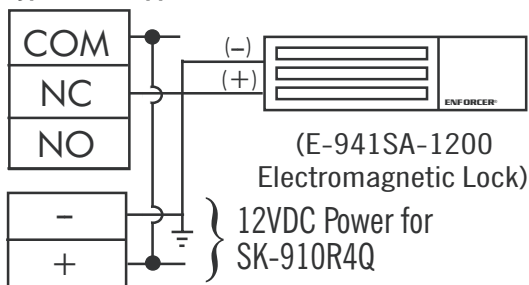

12VDC power input, 12VDC positive output:

