

# SECO-LARM®

## SM-206Q / SM-206-41Q (1/4" CONCEALED MOUNT)



49J5  
BP3821

### ALARM CIRCUIT:

For closed circuit (CC) systems only.

### CONTACT TYPE:

SPST, gold under-plating with DEACTIVATED RHODIUM outer-plating (**SECO-LARM** contacts have a unique RHODIUM plating that have gone through a special oxygen treatment to DEACTIVATE the surface and thus eliminate absorption of organic impurities, polymer growth during operation, as well as the possibility of contact freezing).

**SWITCH CYCLES:** 50 million.

**OPERATION GAP:** 1 inch (25.0 mm) (**SM-206Q**)  
2 inch (50.0 mm) (**SM-206-41Q**)

### APPLICATIONS:

Perfect for sliding aluminum doors, windows and screens. (Hidden mounting in windows, and doors made simple.). For installation on steel doors, windows, and screens, a stronger magnet may be necessary. Contact **SECO-LARM** or your local distributor for more information.

**COLORS:** White, mahogany brown, grey (specify).

### CASE CONSTRUCTION:

Weatherproof, high-impact ABS plastic. Switch is enclosed in a moisture-resistant, corrosion-resistant epoxy compound.

### MAGNET:

Alnico 5.

**LEADS:** Pre-wired 15", #22.


**RATING:** 0.1Amp./100VDC (max.)  
1Amp./10VDC (max.)  
10W (max.)

**TEMPERATURE:** -15°F to 160°F (-25°C to 70°C).


### WARNING:

To avoid cracking the internal reed switch please do not use force to pull the wire leads.

Note: Products with model number that ends with "Q" or have a round green "Q" sticker represents RoHS compliant products.

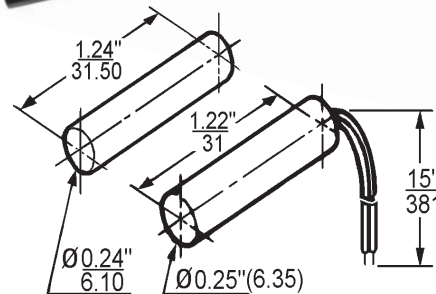

SM-206Q

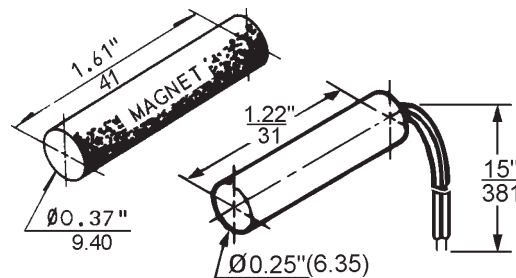

SM-206-41Q



PRODUCT INFO.

SM-206Q / SM-206-41Q  
(1/4" CONCEALED MOUNT)