

Outdoor Stand-Alone / Wiegand Keypad with Proximity Reader

SK-2612-SPQ Keypad and Proximity Card Reader

Features

- 1,000 Users (up to 998 users and 2 duress users)
- User code length 4~6 digits
- 12~24 VAC/VDC Operation, low current draw – 105mA max.
- Form C relay output – 2A@12VDC
- Adjustable output time – 0.5~99s, or toggle
- Built-in tamper alarm and external alarm (duress) output
- Backlit keypad and multicolor status LED
- EM 125kHz*
- Easy transfer of users to additional devices using Wiegand output
- All features programmed directly on the keypad: No need for an external programmer
- Egress input lets users exit the premises without a code/card
- Can serve as either Wiegand reader or controller, both output and input are selectable 26~37 bits
- 2-Door interlock function
- Extreme cold tolerance to -40° F (-40° C)
- Epoxy-filled black ABS plastic housing – Weather-resistant IP66



12~24
VAC/VDC

IP66

Stand-Alone
or Wiegand


1,000
Users

*Proximity cards or key fobs available from SECO-LARM

Specifications

Operating voltage	12~24 VAC/VDC	
Current draw	Standby	40mA@12VDC
	Active	105mA@12VDC (max.)
Outputs	Form C	NO/NC/COM, 2A@12VDC
	Alarm	Transistor ground, 2.5A@12VDC
	Wiegand	26~37 bits, PIN output bits – 4, 8, or 10
Inputs	Egress	N.O. Ground
	Door Sensor	N.C. Ground
	Wiegand	26~37 bits, PIN output bits – 4, 8, or 10
Card type	EM 125kHz	
Enclosure / IP Rating	Epoxy-filled black ABS plastic, IP66	
Operating temperature	-40°~140° F (-40°~60° C)	
Dimensions	1 ¹⁵ / ₁₆ "x4 ³ / ₄ "x1 ⁵ / ₁₆ " (49x120x24 mm)	
Weight	5.8-oz (165g)	

Dimensions

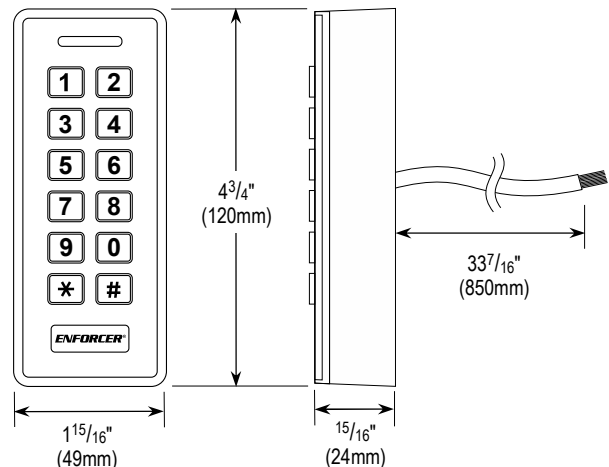

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2024 SECO-LARM U.S.A., Inc. All rights reserved.

All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PI_SK-2612-SPQ_240304.docx