



SS-202Q Window Foil Connector (for N.C. Circuits)

With UL Recognized Double-Sided Foam Tape

Features

- UL listed for supplementary protection
- Handsome, durable, clear polycarbonate base – just like glass.
- Double-blocked – mounts directly on glass for fast, reliable foil connection by using strong, self-adhering UL-recognized double-coated tape.
- If a single block is needed, simply break it off at the seam.
- Special nickel-plated clips and screws provide maximum protection against corrosion.
- Each block has a lip on its side to protect the foil from slipping out of place – thus reducing ground shorts.
- Used to complete the circuit between the foil and any protective closed-circuit alarm system.

SECURITY



Type:S
49J5




Specifications

- Terminals, nuts, foil clip are made of Nickel-plated brass.
- Tamper circuit: Normally Closed
- Contact Rating: 50mA@130VDC
- Base: Polycarbonate
- Foil Width: 10.5mm
- Wire size: AWG#24 (minimum)
- Dimensions: 1⁵/₈"x1¹/₂"x3³/₈" (42x13x9mm)
- Weight: 1/2 oz (14g)



Installation

1. Decide the appropriate position for the SS-202Q to be mounted on the window. When using the two-sided foam tape, make sure the mounting surface is completely free of dirt, dust, or grease, before applying the tape. Use a cleaner suitable for the mounting surface (i.e. on window glass, alcohol or a similar-type cleaning solution is recommended).
2. Loosen or unscrew the two screws and attach the foil.
3. While the two screws are still loosened, connect wires to each of the two screws and then connect the other end of the two wires to the N.C. input of the alarm system.
4. Tighten the two screws.

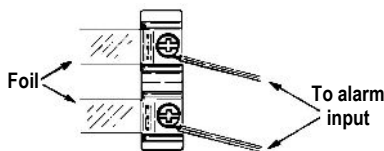

IMPORTANT: Users and installers of this product are responsible for ensuring that the installation and configuration of this product complies with all national, state, and local laws and codes. SECO-LARM will not be held responsible for the use of this product in violation of any current laws or codes.

California Proposition 65 Warning: These products may contain chemicals which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

WARRANTY: This SECO-LARM product is warranted against defects in material and workmanship while used in normal service for 1 (one) year from the date of sale to the original customer.

NOTICE: The SECO-LARM policy is one of continual development and improvement. For that reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is also not responsible for misprints. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. Copyright © 2023 SECO-LARM U.S.A., Inc. All rights reserved.

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606
Phone: (949) 261-2999 | (800) 662-0800

Website: www.seco-larm.com
Email: sales@seco-larm.com



PITSW1

Order Part #:763-044-4%

MI_SS-202Q_230930.docx