

Illuminated RTE Plates Slimline

SD-7103GC-PEQ *Stainless steel plate*

SD-7103GC-PTQ *Stainless steel plate with timer*



Features

- ETL, Conforms to UL Std. 294
- Illuminated push button with caption "PUSH TO EXIT"
- Message language can be easily changed in the field to Spanish or French
- CE and UL approved switch is rubber-sealed to prevent liquid penetration
- Includes stainless-steel slimline plate - Dimensions: 4 1/2"x1 1/2"x1 15/16" (114x38x49 mm)
- Includes six colored 12-inch wire leads with easy to attach spade lugs for fast installation
- Long-life green LED 12/24 VAC/VDC (Approx. 35,000 hrs)
- Weather resistant when properly installed

SD-7103GC-PEQ Includes


- Momentary switch, DPST, NO/NC contacts rated 5A@24VAC max.

SD-7103GC-PTQ Includes


- Timed output from 1~180 s
- SPDT Switch rated 3A@24VDC
- Buzzer output for audio status



Wiring Diagram

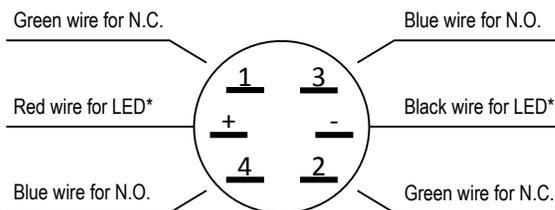

Timer (SD-7103GC-PTQ only)

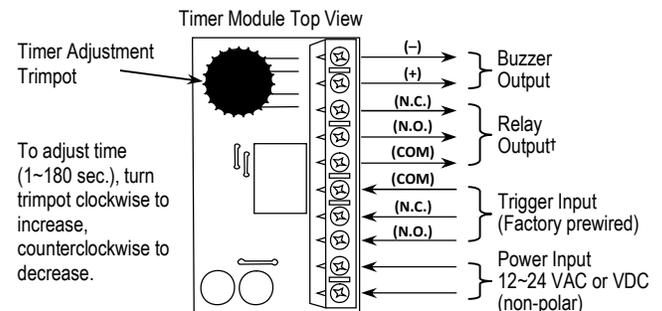

***IMPORTANT:** For 24VDC operation, use the included 680Ω, 0.5W resistor in line with the red wire or the black wire.

NOTE: Terminal legend can be found on back of PCB.

†Relay rated 3A@24VDC

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2023 SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PL_SD-7103GC-PxQ_230921.docx