

Heavy-Duty Outdoor Access Control Keypad with Proximity Reader

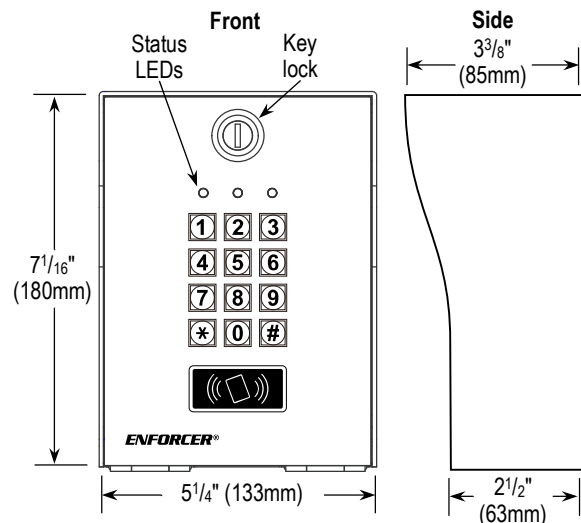
SK-3133-PPQ

Features

- Rugged construction – heavy-duty stainless steel faceplate with coated steel housing
- Built-in proximity reader
- 12~24 VAC/VDC Auto-adjusting operation
- Up to 1,000 possible user codes/cards for output 1 and 100 each for outputs 2 and 3
- Up to 50 possible visitor codes, for one-time or limited-time use (1~99 hours)
- Up to 50 duress codes for output 1 and 10 each for outputs 2 and 3
- Output 1: Form C relay, 5A@24VDC max. / output 2 and 3: Form C relay, 1A@24VDC max.
- Outputs 1, 2 and 3 can be programmed to activate for up to 99,999 seconds (nearly 28 hours)
- Wiegand output, 26, 34, 37 bits
- Tamper output, 50mA@24VDC max.
- Egress input lets users exit the premises without keying in the code
- Door sensor input for anti-tailgating operation
- Interlocking input for connecting to a second keypad
- Keypad illuminates when a button is pressed, programmable for FULL or AUTO in standby
- Vandal resistant, suitable for wall, post, or gooseneck mounting
- IP66 Weatherproof



Overview

**SECO-LARM® U.S.A., Inc.**

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com

Copyright © 2025 SECO-LARM U.S.A., Inc. All rights reserved.
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PL_SK-3133-PPQ_241108.docx

Specifications

Operating voltage		12~24 VAC/VDC
Current draw (@12VDC)	Standby	80mA
	Keypress	114mA
	Output 1 active	150mA
	Outputs 1 & 2 active	180mA
	Outputs 1, 2, & 3 active	220mA
	Wiegand data output	150mA
	Total (max.)	270mA
Outputs	#1 Form C	5A@24VDC
	#2 Form C	1A@24VDC
	#3 Form C	1A@24VDC
	K or A	100mA@24VDC
	Duress	100mA@24VDC
	Interlock	100mA@24VDC
	Tamper	50mA@24VDC
	Wiegand	26~27 bits
Inputs	Egress	N.O. Ground
	Door sensor	N.C. Ground
	Door inhibit	N.O. Ground
Proximity reader frequency		125kHz (EM125)
Proximity reader sensing distance		1 1/2" (38mm)
IP Rating		IP66 Weatherproof
Operating humidity		5~95%, non-condensing
Operating temperature		-4°~158° F (-20°~70° C)
Material	Faceplate	1/16" (1.5mm) Stainless steel
	Housing	5/64" (2mm) Anodized steel, powder paint
Dimensions		5 1/4"x7 1/16"x3 3/8" (133x180x85 mm)
Weight		3-lb 12-oz (1.7kg)

Accessories

Proximity Key fobs



PR-K1K1-AQ

Proximity Cards



PR-K1S1-A