

## Sensors

# Wireless Weatherproof Entry Alert System


E-931CS22RFCQ Sensor Range: Up to 22ft (7m)

Wireless Range: Up to 328ft (100m)

#### Features:

- Monitor a driveway or use as an entrance indicator
- No wiring necessary between sensor and speaker
- Sensor can pair with an unlimited number of speakers
- · Speaker can pair with up to five sensors
- · Sensor is weatherproof for outdoor use
- Speaker makes chime or alarm sound when beam is interrupted
- Alarm output time is adjustable from 3~30 seconds
- Includes weatherproof wireless reflective sensor (TX), wireless speaker (RX), reflector, two power adapters, three mounting brackets (for the sensor, reflector, and speaker)
- New optional wall-mount bracket available

### Wiring:

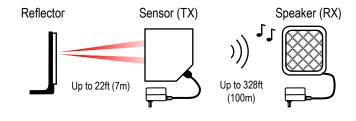







#### **Specifications:**

		Sensor	Speaker
Sensing range		Up to 22ft (7m)	N/A
Wireless range		Up to 328ft (100m)	
Operating frequency		433.92 MHz	
Operating voltage		12VDC	
Current draw	Standby	5mA	25mA
	Active	20mA	100mA
Power input		2.5mm DC Jack	
Light source		IR LED	N/A
Operating temperature		32°~122° F (0°~50° C)	
Volume		N/A	0~90 dB
Alarm time range		N/A	3~30 s (adjustable)
Speaker output		N/A	Chime/Off/Alarm (selectable)
IP Rating		IP55	N/A
Dimensions		3 <sup>1</sup> / <sub>4</sub> "x2 <sup>9</sup> / <sub>16</sub> "x1 <sup>1</sup> / <sub>2</sub> " (82x66x38 mm)	3 <sup>1</sup> / <sub>4</sub> "x2 <sup>15</sup> / <sub>16</sub> "x1 <sup>9</sup> / <sub>16</sub> " (83x75x40 mm)

### **Optional Accessories:**

E-931ACC-RC1Q 3" Round reflector



E-931ACC-BLS8Q Wall bracket





**E-931ACC-SFQ** Additional wireless speaker



E-931ACC-HR1Q Reflector hood



**E-931ACC-CQ** *Digital counter* 



E-931ACC-SPQ Solar charger for sensor unit



SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

**Phone:** (949) 261-2999 | (800) 662-0800 **Fax:** (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



