

IP Covert PIR Camera

EV-N6506-3W4Q 3.7mm Pinhole lens, 5MP

Features

- 5MP Resolution
- 1/2.8" 5MP Low illumination CMOS
- H.265 Dual Stream IP Camera
- ICR module
- 2DNR & 3DNR (Digital Noise Reduction)
- D-WDR (Digital Wide Dynamic Range)
- 3.7mm Covert pinhole lens
- 18 Covert IR LEDs for discreet monitoring
- 12VDC operation, 802.3af PoE
- Camera is hidden in a non-functioning PIR sensor housing




Specifications

Type	Covert PIR Camera
CMOS	1/2.8" 5MP Low illumination CMOS
Resolution (HD)	2880x1616
Video compression	H.265
# of IR LEDs	18 Covert (940nm)
IR Range	Up to 50ft (15m)
FPS	25
F Stop	1.2
Minimum illumination (IR On)	0.01 Lux
illumination (IR Off)	0.001 Lux
Primary stream rate	32Kbps~8Mbps
Secondary stream rate	
Operating voltage	12VDC, 802.3af PoE
Operating temperature	-4°~140° F (-20°~60° C)
Dimensions	4 1/16"x2 3/8" x1 5/16" (104x60x34 mm)
Weight	12.3-oz (350g)

Digital Wide Dynamic Range



3D Digital Noise Reduction

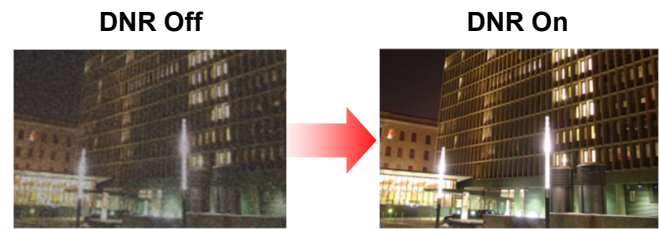

Simulated images

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2024 SECO-LARM U.S.A., Inc. All rights reserved.
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.
SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PL_EV-N6506-3W4Q_240305.docx