

HD 5MP 2.8~12 mm Varifocal Bullet Camera

EV-Y1501-AMWWQ 2.8~12 mm Lens




The ENFORCER HD 5MP Varifocal Bullet Camera offers high-resolution video and advanced technology in a compact and accessible package. With True Wide Dynamic Range (WDR), Digital Noise Reduction (3DNR) and Day/Night (ICR) capabilities, the camera provides excellent picture quality.

Features

- 1/2.8" 5MP Sony CMOS Sensor
- 5MP@20FPS, (2592x1944)
- 2.8~12 mm Varifocal lens
- TVI, CVI, AHD, CVBS (Analog)
- True Wide Dynamic Range (WDR)
- 3D Digital Noise Reduction (3DNR)
- True Day & Night Function with ICR Module
- IR Range 115' (35m)
- Operating temperature: -40°~131° F (-40°~55° C)
- Rugged weatherproof construction (IP66)
- Heavy-duty vandal-resistant design
- Cables concealed in bracket to prevent tampering
- 12VDC



Dimensions

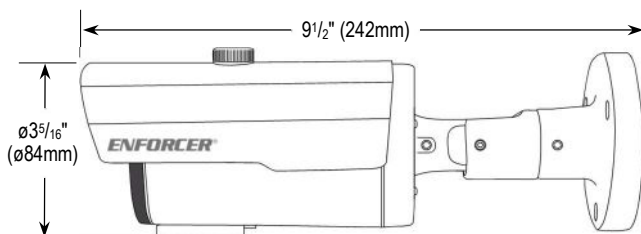

Accessories

Junction Box



EV-SCWQ

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2023 SECO-LARM U.S.A., Inc. All rights reserved.
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PI_EV-Y1501-AMWWQ_230221.docx

Camera

Image sensor	1/2.8" 5MP Sony CMOS
Effective pixels	2592(H)x1944(V)
Formats	TVI (Default) / CVI / AHD / Analog (CVBS)
OSD (On-screen display)	Yes
S/N ratio	35db
Minimum illumination	Color: 0.05Lux at F1.2 (AGC on) 0Lux with IR on
IR Distance	Distance up to 115' (35m)
IR LEDs	4x 850nm LEDES

Lens

Lens type	Varifocal
Focal length	2.8~12 mm
Maximum aperture	F1.8~3.3
Field of view	37°~134°

Video

Resolution	2592x1944
WDR	Yes
Shutter control	Auto
White balance	Auto
Gain control	Auto
Noise reduction	3DNR
Privacy masking	Off, on (4 areas, rectangle)

Certifications

Certifications	CE, FCC, RoHS
----------------	---------------

Electrical

Operating voltage	12VDC	
Current Draw	IR On	440mA
	IR Off	80mA

Environmental

Operating temperature	-40°~131° F (-40°~55° C)
IP Rating	IP66 Weatherproof

Construction

Casting	Metal
Dimensions	Ø3 ⁵ / ₁₆ "x9 ¹ / ₂ " (ø84x242 mm)
Weight	1-lb 6-oz (760g)