

Fire-Rated No-Cut Electric Door Strike

SD-995C-D3F Fire-Rated, Low-Profile

Fire-rated and built to last, the SECO-LARM Fire-Rated No-Cut Electric Door Strike combines safety and convenience with a sleek 1 1/16" profile and easy installation on aluminum or other metal frames. With a 1-million-cycle durability and seamless compatibility with panic hardware, it's the smart, worry-free choice for secure indoor access.



Features

- ETL Listed. Conforms to UL Std. 10C, 10B, CAN/ULCS 104, and NFPA 252
- Low profile: Only 1 1/16" deep for use with aluminum/metal frames
- Field selectable for fail-safe or fail-secure operation
- Mounting tabs included for mounting to hollow aluminum and metal frames
- Reversible non-handed design fits either right- or left-hand doors
- For indoor use only
- Static strength – 1,500-lb (680kg)
- Dynamic strength – 70ft-lb (9.68m-kg)
- 12/24 VDC Operating voltage
- Tested to 1,000,000 cycles (Factory Tested)
- Low current draw: 300mA@12VDC, 150mA@24VDC
- Mounting hardware included

NOTE: SD-995C-D3F has no horizontal or vertical adjustments.


Fire-Rated

12/24 VDC

Low Current Draw

1 1/16" Low Profile

Dimensions

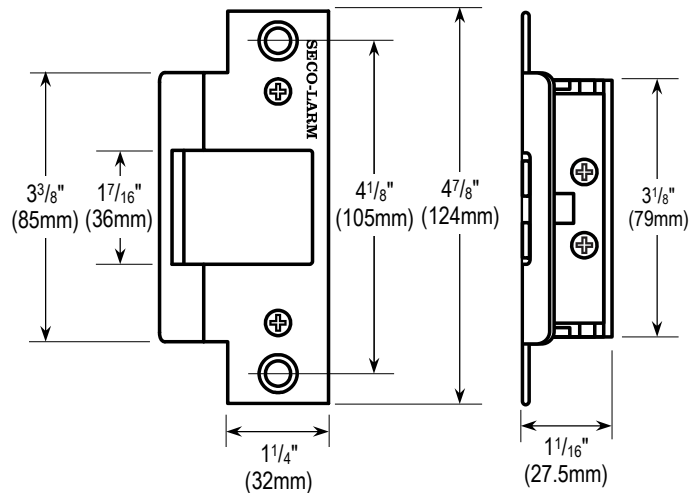

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2026 SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PL_SD-995C-D3F_260128.docx

Specifications

Operating voltage	12~24 VDC
Operation type	Fail-secure / fail-safe*
Current draw (max.)	12VDC
	24VDC
Latch throw (max.)	3/4" (19mm)
Keeper width	17/16" (36mm)
Design	Reversible, for right- or left-handed doors
Endurance	250,000 cycles (UL Tested), 1,000,000 cycles (Factory Tested), Level IV
Destructive attack	Level I
Line security	Level I
Standby power	Level I
Static strength	1,500-lb (680kg)
Dynamic strength	70ft-lb (9.68m-kg)
Connectors	12VDC and 24VDC wiring harnesses provided
Operating humidity	0~85% non-condensing
Operating temperature	14°~120° F (-10°~49° C)
Color/finish	Brushed aluminum
Dimensions	47/8"x11/4"x11/16" (124x32x27.5 mm)
Weight	11.3-oz (320g)

*IMPORTANT: To maintain the fire rating, the SD-995C-D3F must be used in fail-secure mode only. If it is used in fail-safe mode, the fire rating becomes invalid, and the 'Listed Fire Rated Hardware' label must be removed.