

## Square Illuminated Pushbutton RTE Plates

- SD-7202GC-PEQ** SPDT, Single-gang, ETL
- SD-7202GC-PTQ** SPDT, Single-gang, Timed Output, ETL
- SD-7202GF-PEQ** DPDT, Single-gang



### Features

- 12~24 VDC Operating voltage, no resistors required
- Large, illuminated pushbutton with caption "PUSH TO EXIT"
- 3 Message plates easily switched (English, Spanish, & French)
- Includes 12" spade lug, color wire leads for fast installation
- LED gives over 50,000 hours of illumination
- Includes stainless steel single-gang faceplate
- IP65 Weatherproof

### SD-7202GC-PTQ Additionally Includes:


- Timed output adjustable from 1~180 seconds
- Buzzer output for audible status

### SD-7202GF-PEQ Only:

- DPDT Output rated 5A@30VDC/125VAC



Interchangeable message plates included:

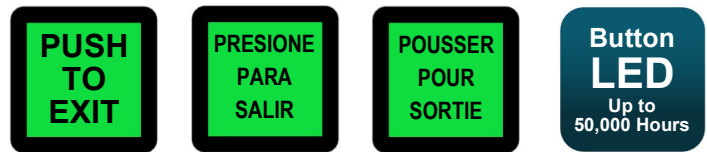

### Specifications

Model	SD-7202GC-PEQ	SD-7202GC-PTQ	SD-7202GF-PEQ
Certifications	ETL, CE, RoHS		CE, RoHS
Operating voltage	12~24 VDC		12/24 VDC
Current draw (max.)	12VDC	8mA	
	24VDC	18mA	
Output	SPDT		DPDT
	Type Rating	50A@24VAC	3A@24VDC
Timer	No	Yes (1~180s)	No
Buzzer	No	Yes	No
Faceplate type	Single-gang, brushed stainless steel		
Button type	Large, square, LED-illuminated with interchangeable message plates (English, Spanish, and French)		
Connectors	12" (25cm) Colored leads with spade lugs		
Destructive attack level	Level I		n/a
Line security	Level I		n/a
Endurance level	Level I		n/a
Standby power	Level I		n/a
IP Rating†	IP65 Weatherproof		
Operating temperature	-40°~167° F (-40°~75° C)		
Dimensions	4 1/2" x 2 3/4" x 2 3/4" (114x70x70 mm)		4 1/2" x 2 3/4" x 2" (114x70x51 mm)
Weight	3.7-oz (105g)	4.7-oz (133g)	2.9-oz (81g)

\*The SD-7202GF-PEQ is not ETL certified.

†When installed correctly

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: [www.seco-larm.com](http://www.seco-larm.com) Email: [sales@seco-larm.com](mailto:sales@seco-larm.com)



Copyright © 2026 SECO-LARM U.S.A., Inc. All rights reserved.  
 All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.  
 The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

**SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®**

PL\_SD-7202Gx-PxQ\_251205\_ML.docx

## Placas RTE con Botón Iluminado Cuadrado

- SD-7202GC-PEQ** SPDT, Placa Ancha, ETL
- SD-7202GC-PTQ** SPDT, Placa Ancha, Salida Temporizada, ETL
- SD-7202GF-PEQ** DPDT, Placa Ancha



### Funciones

- 12~24 V C.C.: No se requieren resistencias
- Botón grande, iluminado con leyenda "PUSH TO EXIT"
- 3 Placas de mensaje intercambiables (inglés, español y francés)
- Incluye cables con terminal de pala de 12" para instalación rápida
- LED de más de 50,000 horas de iluminación
- Incluye placa singular de acero inoxidable
- IP65 Impermeable



### SD-7202GC-PTQ Incluye Además:

- Salida temporizada ajustable desde (1-180 seg)
- Salida de zumbador para estado audible

### Solo SD-7202GF-PEQ:

- Salida DPDT con capacidad de 5A@30VCC/125VCA,

Placas de mensaje intercambiables incluidas:



### Especificaciones

Modelo	SD-7202GC-PEQ	SD-7202GC-PTQ	SD-7202GF-PEQ
Certificaciones	ETL, CE, RoHS		CE, RoHS
Tensión de funcionamiento	12~24 VDC		12/24 VDC
Sorteo actual (max.)	12V CC	8mA	
	24V CC	18mA	
Output	SPDT		DPDT
	Tipo		
	Clasificación	50A@24VAC	3A@24VDC
Temporizada	No	Yes (1~180s)	No
Zumbador	No	Yes	No
Tipo de placa frontal	Single-gang, brushed stainless steel		
Tipo de botón	Large, square, LED-illuminated with interchangeable message plates (English, Spanish, and French)		
Conectores	12" (25cm) Colored leads with spade lugs		
Nivel de resistencia a ataques destructivos	Level I		n/a
Seguridad de línea	Level I		n/a
Nivel de resistencia (endurance)	Level I		n/a
Consumo en espera	Level I		n/a
Clasificación IP†	IP65 Weatherproof		
Temperatura de funcionamiento	-40°~167° F (-40°~75° C)		
Dimensiones	4 1/2"x2 3/4"x2 3/4" (114x70x70 mm)		4 1/2"x2 3/4"x2" (114x70x51 mm)
Pesos	3.7-oz (105g)	4.7-oz (133g)	2.9-oz (81g)

\*El SD-7202GF-PEQ no cuenta con certificación ETL.

†Cuando se instala correctamente

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2026 SECO-LARM U.S.A., Inc. Todos los derechos reservados. Todas las marcas comerciales son propiedad de SECO-LARM U.S.A., Inc. o sus respectivos propietarios. La póliza de SECO-LARM es de desarrollo y mejora continua. Por esa razón, SECO-LARM se reserva el derecho de cambiar las especificaciones y los precios sin previo aviso. SECO-LARM tampoco es responsable de errores de impresión.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®

PL\_SD-7202Gx-PxQ\_251205\_ML.docx