

Magnetic Door Holders

DH-171SQ Flush mount

DH-151SQ Surface-Mount

DH-115B Floor-Mount, Manual Release Switch

SECO-LARM Magnetic Door Holders are useful for virtually any remote door release application. Since they are UL-Listed, use them with UL-Listed SECO-LARM door closers to control the release and closing of residential, commercial, and public area doors including apartments, schools, hotels, hospitals, and offices. Fail-safe operation, tri-volt coils, and an adjustable armature plate enable easy and flexible installation. Available in various models with full mounting hardware included.

33-lb
Holding
Force

Flexible
Voltage

Built-in
Surge
Suppression

Fail-
Safe

Features

- Adjustable armature (DH-100A-01SQ, included) simplifies installation and adjusts to door alignment changes
- Flexible voltage – 12VAC/VCD, 24VAC/VCD, 120VAC
- Surface-, flush-, and floor-mount models available
- Fail-safe operation
- Holding force – 33-lb (15kg)
- No residual magnetism for easy release
- Built-in voltage surge suppression
- Optional extension bars available: 3/4", 1", 4", 7" (19mm, 25mm, 102mm, 178mm)
- Use with any SECO-LARM UL-Listed door closers
- 5-Year warranty

DH-115 Includes the above plus

- Includes manual release button for immediate securing of an area or after-hours cleaning



DH-171SQ



DH-151SQ



DH-115B

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com



Copyright © 2026 SECO-LARM U.S.A., Inc. All rights reserved.
All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA® SLI®


PL_DH-1xxxx_260722.docx

Specifications


Model	DH-171SQ		DH-151SQ		DH-115B	
Operating voltage		12 VAC/VDC, 24 VAC/VDC, 120VAC (selectable, factory preset at 120V)				
Current draw	12V	52mA@12VAC, 60mA@12VDC				
	24V	27mA@24VAC, 31mA@24VDC			30mA@24VAC, 31mA@24VDC	
	120VAC	24mA			29mA	
Holding force		33-lb (15kg)				
Manual release		No			Yes	
Mounting type		Flush-mount		Surface-mount		Floor-mount
Dimensions	Magnet	2 ³ / ₄ "x4 ⁹ / ₁₆ "x2 ¹ / ₁₆ " (70x116.5x52 mm)		2 ³ / ₄ "x4 ⁹ / ₁₆ "x3" (70x116.5x76 mm)		3 ⁷ / ₁₆ "x4 ⁷ / ₁₆ "x3 ¹ / ₈ " (88x112x80 mm)
	Armature	ø2 ⁹ / ₁₆ "x 1 ⁹ / ₁₆ " (ø65x40 mm)				
Weight	Magnet	1-lb 1.6-oz (498g)		1-lb 6.6-oz (641g)		1-lb 6.4-oz (635g)
	Armature	8.4-oz (237g)				

Overview


DH-171SQ

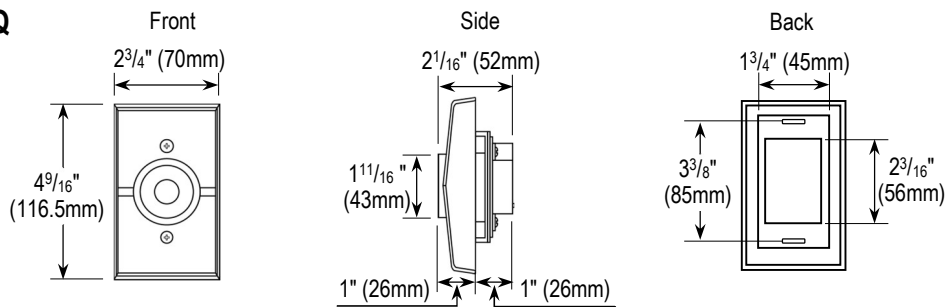




DH-151SQ

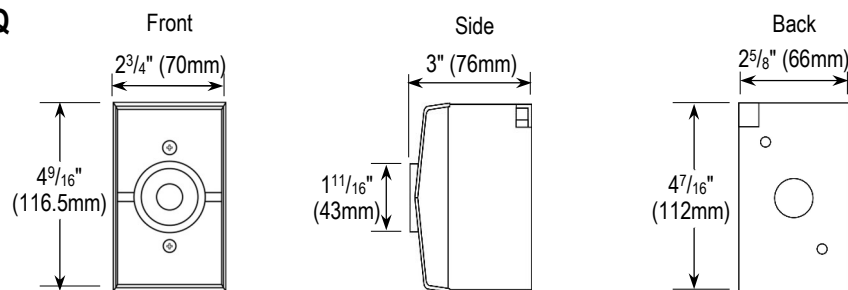

DH-115B

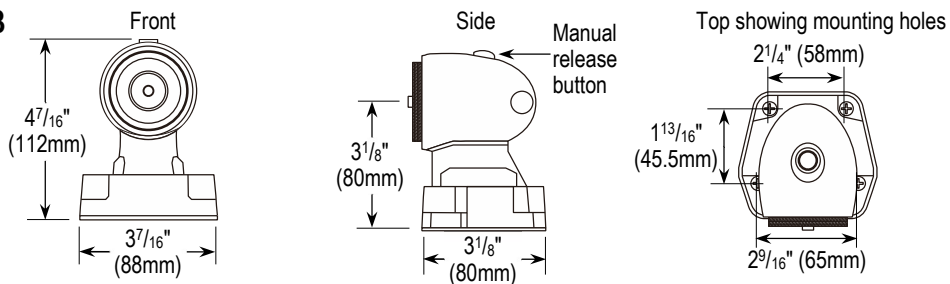

Armature



Accessories

Armature Plate



DH-100A-01SQ

3/4" Extension Bar



DH-100E-07SQ

1" Extension Bar



DH-100E-10SQ

4" Extension Bar



DH-100E-40SQ

7" Extension Bar



DH-100E-70SQ