

SSW-113H Water Sensor Manual

2PCS



Features:

- Install anywhere water damage may occur
- Detects conductive, non-flammable liquids
- For open loop circuits
- Automatic reset


Parts List:

- 2x Water Sensor 4x Screws
1x Manual

Specifications:

Loop type	Open loop	
Electrical configuration	N.O.	
Operating voltage	5-24 VDC	
Current draw (max.)	12VDC	30mA
	24VDC	50mA
Wire	6ft (1.8m) 2C (22AWG)	
Case	Color	White
	Material	ABS
Operating temperature	32°~140° F (0°~60° C)	
Dimensions	2 1/2" x 1 1/2" x 1 1/2" (64x13x13 mm)	
Weight	1.6-oz (44g)	


Dimensions:

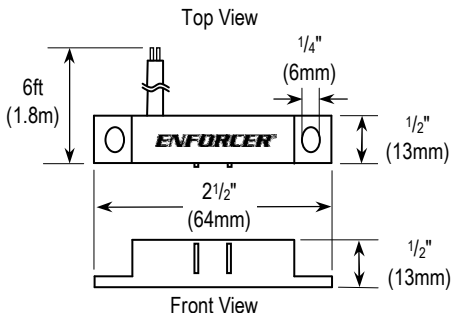

Sample Application:


NOTE: Connect Water Sensor to an alarm control panel or relay module. Do not wire directly to siren, strobe, etc. After installation, test unit with damp sponge or paper. Inspect annually and replace if there is any corrosion or damage.

Alarm Control Panel



*If the panel uses an EOL resistor (not included), then 6VDC is the minimum requirement.

Relay Module

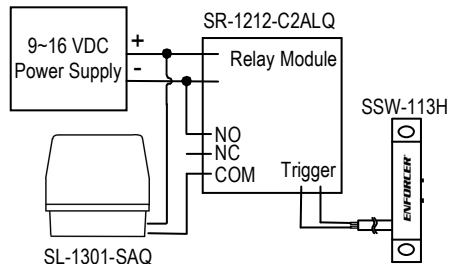

WARRANTY: This SECO-LARM product is warranted against defects in material and workmanship while used in normal service for two (2) years from the date of sale to the original customer.

NOTICE: The SECO-LARM policy is one of continual development and improvement. For that reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is also not responsible for misprints. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. Copyright © 2017 SECO-LARM U.S.A., Inc. All rights reserved.

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606
Phone: (949) 261-2999 | (800) 662-0800

Website: www.seco-larm.com
Email: sales@seco-larm.com