

Installation Manual

ENFORCER[®]

SD-7201GA-PT1

Green Mushroom Button with Stainless Plate and Built-in Timer

Features


- Green, 1 1/2" diameter, mushroom-cap push button.
- "EXIT" and "SALIDA" silk-screened on plate.
- Stainless-steel single-gang plate.
- With built-in timer module, field adjustable 1~60 sec.
- N.O./N.C. contact rated 3A @ 24VDC.
- Equipped with buzzer output for audio status indicator.



Wiring

1. Connect 12~24 volts AC or DC power (non-polarity) to the power input terminals on the terminal block of the timer module.
2. Connect N.O. or N.C. devices to the relay output terminals of the terminal block as required.
3. Connect the positive and negative wires of the buzzer to the buzzer output terminals of the terminal block if necessary.
4. Set the ideal time of the timer module between 1~60 sec. via the VR rotary knob as shown. Turn clockwise to increase and counterclockwise to decrease.

SD-7201GA-PT1 Wiring

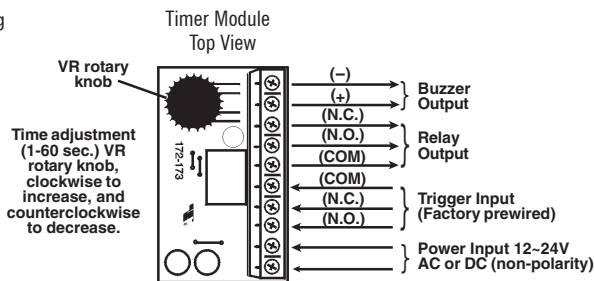

NOTE: Terminal legend can be found on back of the PCB.

WARRANTY: This SECO-LARM product is warranted against defects in material and workmanship while used in normal service for a period of one (1) year from the date of sale to the original consumer customer. SECO-LARM's obligation is limited to the repair or replacement of any defective part if the unit is returned, transportation prepaid, to SECO-LARM.

This Warranty is void if damage is caused by or attributed to acts of God, physical or electrical misuse or abuse, neglect, repair, or alteration, improper or abnormal usage, or faulty installation, or if for any other reason SECO-LARM determines that such equipment is not operating properly as a result of causes other than defects in material and workmanship.

The sole obligation of SECO-LARM, and the purchaser's exclusive remedy, shall be limited to replacement or repair only, at SECO-LARM's option. In no event shall SECO-LARM be liable for any special, collateral, incidental, or consequential personal or property damages of any kind to the purchaser or anyone else.

NOTICE: The information and specifications printed in this manual are current at the time of publication. However, the SECO-LARM policy is one of continual development and improvement. For this reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is also not responsible for misprints or typographical errors.

Copyright © 2006 SECO-LARM U.S.A., Inc. All rights reserved. This material may not be reproduced or copied, in whole or in part, without the written permission of SECO-LARM.

SECO-LARM[®] U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Tel: 800-662-0800 / 949-261-2999 Fax: 949-261-7326

Website: www.seco-larm.com

E-mail: sales@seco-larm.com

FILE: DT/DTP/MSD7201GA-PT1_06B.pmd

ORDER PART # 763-155%

PITSW1