

FOR IMMEDIATE RELEASE
SECO-LARM® SALES DEPARTMENT
(800) 662-0800
(949) 261-2999
Fax: (949) 261-7326
e-mail: info@seco-larm.com
website: www.seco-larm.com



SECO-LARM Introduces 3 New Illuminated Power Connectors

IRVINE, CALIF., September 7, 2007 - SECO-LARM is now shipping Illuminated Power Connectors to simplify installation and help in troubleshooting of CCTV, Access Control and Security Systems. There are 3 new models:


- CA-1610-3FLQ - Male Plug
- CA-1510-3FLQ - Female Jack
- CA-1615-06LQ - Test Light / 6" Extender

All three have a built-in LED, which simplifies the installation and helps in the troubleshooting of CCTV and Access control products (including CCTV cameras, maglocks, door strikes, etc). The LED lights up when it is connected to power. There are 3 color indicators. Blue: Correct polarity DC, Red: incorrect polarity DC, Purple: AC power. LED remains on while power is connected and shines brighter as voltage increases.

Additional outstanding features include:

- Simplifies installations of any CCTV, Access control, or security application.
- Eases troubleshooting - check at a glance if there is power.
- Check for low voltage AC/DC before connecting your device.
 - Correct DC - Blue
 - Incorrect DC - Red
 - AC Voltage - Purple
- Safety: Illumination glows from all directions to indicate voltage.
- Saves Money and Time: Test power before connecting equipment.
- 5 ~ 30 VAC/VDC Range.
- LED shines brighter as voltage increases.
- Patent Pending (USA and Int'l)

(High-Resolution
Photos Available)

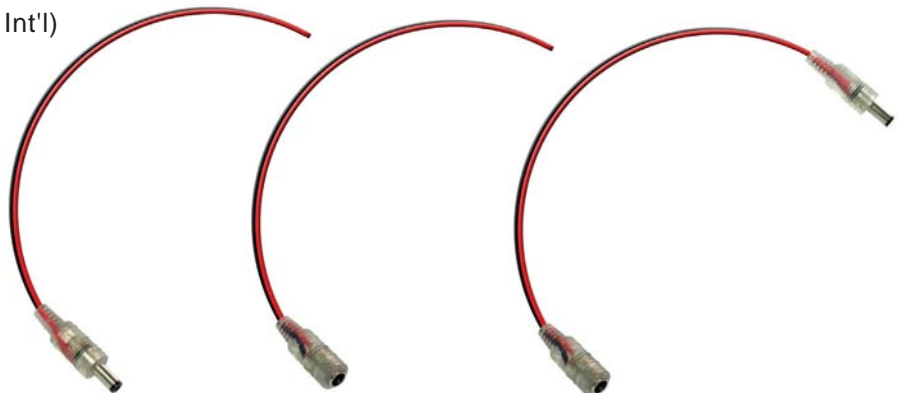

The new Illuminated Power Connectors are just a few of SECO-LARM's wide selection of alarms and accessories for the security and electronics industries. For more information about these products or any of SECO-LARM's full line of residential and commercial security systems and accessories, or to request our latest catalog, please contact the SECO-LARM Sales Department (949) 261-2999 (California), fax (949) 261-7326 or (800) 662-0800, or visit us on the Web at seco-larm.com.