

# Multi-Purpose Programmable Timer with Protective Case

## **SA-025Q**


The ENFORCER® SA-025Q Multi-Purpose Programmable Timer with Protective Case is suitable for use with a wide range of timed security and access control products, such as electric door strikes, sirens, or bells. DIP switches for programming and auto-sensing of input voltage make installation easy.

#### Features:

- Timer can be set from 1 second to 60 minutes
- Protective case:
  - Protects the product from the environment
  - Prevents dust and dirt build up
  - Makes product easier to mount
  - Easy to hide and protect the terminals
- Can be triggered by positive voltage (+DC), or closure or opening of dry contact
- Relay can be programmed to activate at the start or at the end of the timing cycle
- Relay can also be set to activate for one second at the end of the timing cycle
- Programmable for pulse (flash) activation
- Built-in reset function to manually reset timing cycle
- Form C relay, contacts rated 8A@120VAC/24VDC
- LED indicates relay is energized
- 12VDC/24VDC Operation (auto sensing)
- Current: 1mA (standby), 50mA (active)
- Board measures 2<sup>7</sup>/<sub>8</sub>" x 2<sup>1</sup>/<sub>2</sub>" (73x63 mm)
- Functions programmed via DIP switches no jumpers to cut

#### Also Available from SECO-LARM®:








**SA-025EQ**Delayed Egress Timer



### **Sample Application:**

In this application, the **SA-025Q** is connected to an electric strike (**SD-995C**) and an N.O. contact or switch. The output is set via the DIP switches for a momentary trigger with no delay.

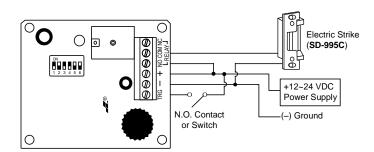

## **DIP Switch Settings:**

Switch	Off	On
#1	Fixed 1 sec.	Variable Relay
	Relay output time	output time
#2	Relay energizes at start of	Relay energizes at
	timing cycle	end of timing cycle
#3	REPEAT timing cycle	SINGLE timing cycle
#4	Time in MINUTES	Timing in SECONDS
#5	Timing controlled	Timing controlled
	by TRG input	by Power Up
#6	Counter begin at	Counter begin at
	START of TRG	END of TRG



16842 Millikan Avenue, Irvine, CA 92606

**Phone:** (949) 261-2999 | (800) 662-0800 **Fax:** (949) 261-7326 **Website:** www.seco-larm.com **Email:** sales@seco-larm.com

