

3/8" Screw-Terminal Recessed-Mount Contact

SM-407-5TQ/W

3/4" (19mm) Gap, Closed Loop, Screw Terminals, White

Features:

- Used for protecting sliding doors and windows where space is limited
- Gold-plated terminals for longer expected life and reliability
- Screw terminals
- High-impact ABS plastic
- Miniature size for easier concealment
- Switch and magnet have ribs for securing in holes
- 3/8" (10mm) Press-fit
- Contact reed switch is SPST, iridium-plated to have a high melting point and Vickers hardness for higher power handling and longer expected life
- For closed loop circuits
- 3/4" (19mm) Gap
- Lifetime limited warranty







Iridium-Plated Contacts




3/4" Gap

Specifications:

Loop type		Closed loop
Electrical configuration		N.O. (SPST)
Operation gap		³ / ₄ " (19mm)
Connectors		Gold-plated screw terminals
Color		White
Material	Case	High-impact ABS plastic
	Contacts	Iridium-plated
Contact rating		1.0A@10VDC (max.)
		10W (max.)
Operating temperature		-15°~160° F (-25°~70° C)
Switch cycles		50 Million (0.1mA@5VDC)
Switch dimensions		¹⁵ / ₁₆ "xø ⁷ / ₁₆ " (24xø11 mm)
Magnet dimensions		⁹ / ₁₆ "xø ⁷ / ₁₆ " (14xø11 mm)
Magnet		Rare-earth neodymium

Dimensions:

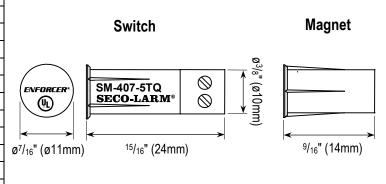

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 **Fax:** (949) 261-7326 **Website:** www.seco-larm.com **Email:** sales@seco-larm.com



Copyright © 2020 SECO-LARM U.S.A, Inc. All rights reserved.

All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners.

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.