

Installation

Please read the manual carefully before you begin the installation.

1. Determine the most suitable location, convenient to be able to discretely reach while also considering how to hide and run the wires.
2. Run the two wires from the door lock to the desired switch mounting location.
3. Remove cover/button unit by removing the single screw in the center.

NOTE: If planning to replace the green button with the red one, do that now (see *Changing the Button*, below).


4. Use the base to mark the installation holes. Drill 2 pilot holes taking care not to drill through the desktop/countertop.
5. For concealed wiring, thread the 2 wires through the wiring hole in the base before mounting. Mount the base, using the 2 mounting screws.
6. Connect the 2 wires for either N.O. or N.C. operation referring to the *Wiring/Overview* diagram, pg. 1.
7. Replace the cover (threading exposed wiring through the notch in the cover's back) and test the switch.

Changing the Button

The standard green button can be replaced with the included red button if desired.

1. Remove the housing cover by removing the single screw on the front.
2. Remove the two button screws and their washers from the button mounting pins.
3. Carefully hold the spring as you remove the button.
4. Move the spring to the replacement button's spring pin and compress it as you place the button over its mounting pins. Carefully release the spring against the center pole.
5. Insert the button screws and washers and turn them until they make loose contact with the button, allowing free movement.
6. Test for free movement and continue with the installation or reinstall the housing cover.

Housing cover – inside view

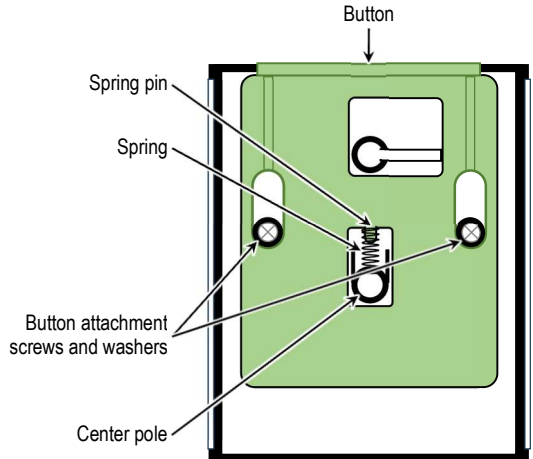

IMPORTANT WARNING: Incorrect mounting which leads to exposure to rain or moisture inside the enclosure could cause a dangerous electric shock, damage the device, and void the warranty. Users and installers are responsible for ensuring that this product is properly installed and protected from moisture.

IMPORTANT: Users and installers of this product are responsible for ensuring that the installation and configuration of this product complies with all national, state, and local laws and codes. SECO-LARM will not be held responsible for the use of this product in violation of any current laws or codes.

California Proposition 65 Warning: These products may contain chemicals which are known to the State of California to cause cancer and birth defects or other reproductive harm. For more information, go to www.P65Warnings.ca.gov.

WARRANTY: This SECO-LARM product is warranted against defects in material and workmanship while used in normal service for one (1) year from the date of sale to the original customer. SECO-LARM's obligation is limited to the repair or replacement of any defective part if the unit is returned, transportation prepaid, to SECO-LARM. This Warranty is void if damage is caused by or attributed to acts of God, physical or electrical misuse or abuse, neglect, repair or alteration, improper or abnormal usage, or faulty installation, or if for any other reason SECO-LARM determines that such equipment is not operating properly as a result of causes other than defects in material and workmanship. The sole obligation of SECO-LARM and the purchaser's exclusive remedy, shall be limited to the replacement or repair only, at SECO-LARM's option. In no event shall SECO-LARM be liable for any special, collateral, incidental, or consequential personal or property damage of any kind to the purchaser or anyone else.

NOTICE: The SECO-LARM policy is one of continual development and improvement. For that reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is also not responsible for misprints. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. Copyright © 2026 SECO-LARM U.S.A., Inc. All rights reserved.

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606
Phone: (949) 261-2999 | (800) 662-0800

Website: www.seco-larm.com
Email: sales@seco-larm.com

 PITSW1
Order Part# 763-0499
ML_SS-079C-MK2_251231.docx