


ENFORCER®

Electric Deadbolt

Model: SD-997BQ

Adds concealed deadbolt security to most wood or hollow metal doors, with the added convenience of electrical operation.

* With control wire which allows for releasing without cutting unit's power.

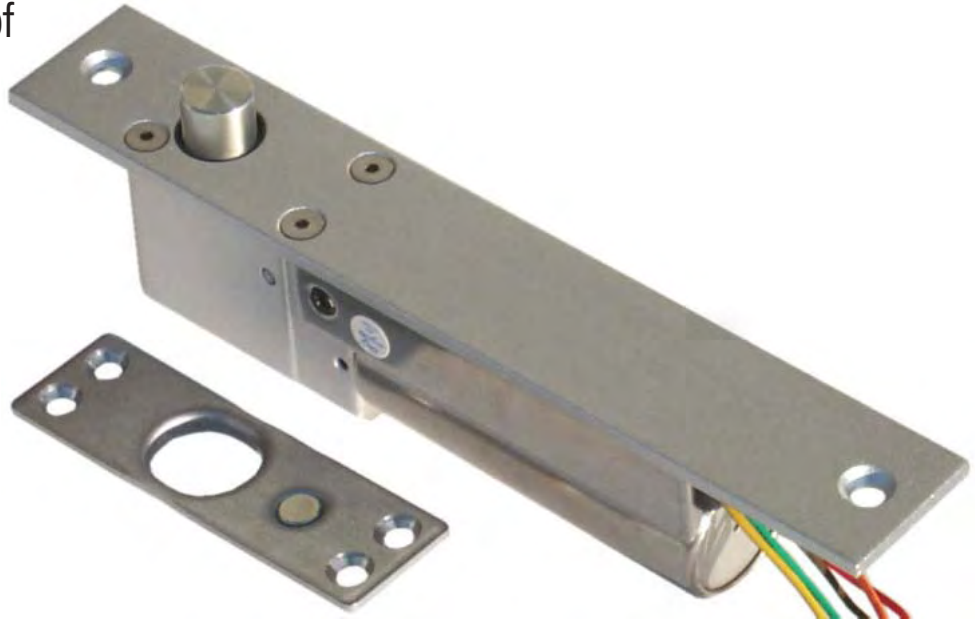

- Stainless steel bolt, $\frac{5}{8}$ " diameter, $\frac{5}{8}$ " throw.
- Fail-safe operation (unlocks if power is lost).
- Door open/close monitor (NO/C/NC).
- Adjustable door lock delay timer — (0, 2.5, 5, or 9 seconds).
- Control wire allows release without cutting unit's power.
- Magnetic switch determines door position for positive locking.
- Solenoid shuts off if door not closed properly to prevent burning out.
- Use with an optional digital keypad for high security without a key.
- Easily connects to SECO-LARM's SK-983A Electronic Keypad.
- Suitable for office-type applications.
- Shallow design for use with most metal door jambs.
- Powered by a solenoid.
- Stainless steel for strength and long life.
- Power — 12VDC, 900mA on activation, 360mA on standby
- Lock body (faceplate) dimensions — $7\frac{7}{8}$ " x $1\frac{5}{16}$ " (200 x 32mm).
- Lock body (cavity) dimensions — $5\frac{3}{4}$ " x $1\frac{1}{8}$ " x $1\frac{1}{2}$ " (145 x 28 x 38mm).
- Strike plate dimensions — $3\frac{9}{16}$ " x 1" x $1\frac{1}{8}$ " (90 x 25 x 3mm).

The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

For more information, contact

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue

Irvine, CA 92606 Copyright© 2001 SECO-LARM U.S.A., Inc.

Tel: 1-800-662-0800 (domestic U.S. & Canada)

Tel: 1-949-261-2999 (California & international)

Fax: 1-949-261-7326 Email: info@seco-larm.com

Website: www.seco-larm.com