

ENFORCER[®] **VIDEO**



EV-1223B12 Black & White **EV-1224C12 Color**

SECO-LARM offers both Black & White and Color Dome Cameras for use in those applications which require an attractive, inconspicuous look. SECO-LARM dome cameras offer high resolution with low lux in a compact and durable enclosure.

EVA-F5521-3 – Optional power cord. For easy connection of dome or bullet camera to power supply.



DIMENSIONS:

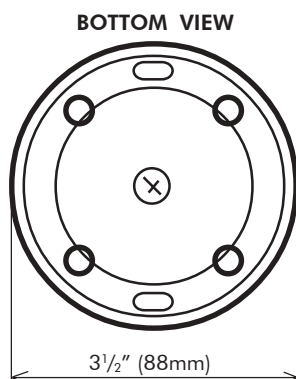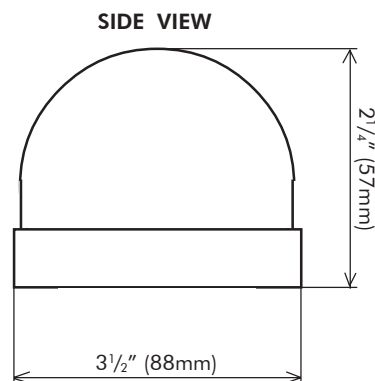

SPECIFICATIONS:

	EV-1223B12 (EIA)	EV-1224C12 (NTSC)
Type	Black and White Dome Cameras	Color Dome Cameras
Chip	1/3" CCD, Sharp	1/3" CCD, Sony
Resolution	400 TV lines	420 TV lines
Pickup elements	512 x 492 pixels	270,000 pixels
Scanning system	2:1 interlace V: 60Hz, H: 15.734KHz	2:1 interlace V: 59.94Hz, H: 15.734KHz
Sync	Internal	Internal
Video output	1 Vp-p composite output, 75 ohms	1 Vp-p composite output, 75 ohms
Lens mount	F3.6mm (lens included)	F4.3mm (lens included)
Minimum illumination	0.08 lux	1.0 lux
Gamma correction	0.45	0.45
S/N ratio	48dB	50dB
Shutter control	Auto Electronic Shutter 1/60~1/100,000 sec.	Auto Electronic Shutter 1/60~1/100,000 sec.
Backlight compensation	N/A	Auto & Manual
Gain control	N/A	AGC
Power source	12VDC ± 10%	12VDC
Current consumption	125mA	60mA
Ambient temperature	14°~122° F (-10°~50° C)	14°~140° F (-10°~60° C)
Relative humidity	30 - 90%	30 - 90%
Dimensions	3 1/2" x 2 1/4" (88 x 57 mm)	3 1/2" x 2 1/4" (88 x 57 mm)
Weight	4.2 oz. (118g)	4.2 oz. (118g)