

Rollerball-Type Recessed-Mount Contact

SM-4303-TQ/W

Rollerball, Closed Loop, Screw Terminals, White

Features:

- Used for protecting sliding doors and windows where space is limited
- Magnet and reed switch contained in housing
- Rollerball plunger travel is ¹/₄" (6mm)
- 360° Rollerball
- Screw terminals
- Contact reed switch is SPST, ruthenium on gold underplating for a longer expected life
- · For closed loop circuits
- Spacer and screws included
- Lifetime limited warranty
















Specifications:

Loop type	Closed loop
Electrical configuration	N.O. (SPST)
Switch type	Plunger
Switch travel	1⁄4" (6mm)
Connectors	Screw terminal
Color	White
Material	High-impact ABS plastic
Contacts	Ruthenium on gold underplating
Contact rating	0.1A@100VDC (max.)
	1.0A@10VDC (max.)
	10W (max.)
Temperature	-15°~160° F (-25°~70° C)
Switch cycles	50 Million (0.1mA@5VDC)
Dimensions	1 ³ / ₄ "x1"x1 ³ / ₁₆ " (44x25x30 mm)
Magnet	Rare-earth neodymium

Dimensions:

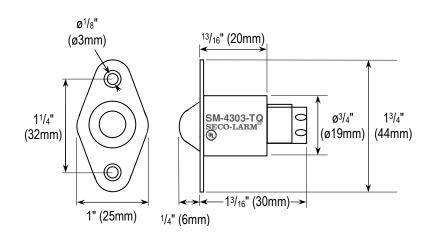

SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

 $\textbf{Phone:} \ (949) \ 261\text{-}2999 \ \mid \ (800) \ 662\text{-}0800 \ \ \textbf{Fax:} \ (949) \ 261\text{-}7326$

Website: www.seco-larm.com Email: sales@seco-larm.com

